


Rundrohre • Round tubes

EN AW-6060 T66 (AlMgSi)




D x S	Länge Length	kg/m
6 x 1 mm	6000 mm	0,043
6 x 1,5 mm	6000 mm	0,057
7 x 1 mm	6000 mm	0,051
8 x 1 mm	6000 mm	0,060
8 x 1,5 mm	6000 mm	0,083
8 x 2 mm	6000 mm	0,102
8 x 2,5 mm	6000 mm	0,117
9 x 1 mm	6000 mm	0,068
10 x 1 mm	6000 mm	0,077
10 x 1,5 mm	6000 mm	0,108
10 x 2 mm	6000 mm	0,136
10 x 3 mm	6000 mm	0,179
12 x 1 mm	6000 mm	0,094
12 x 1 mm	6100 mm	0,094
12 x 1,5 mm	6000 mm	0,134
12 x 2 mm	6000 mm	0,170
13 x 1,5 mm	6000 mm	0,147
13 x 2 mm	6000 mm	0,187
14 x 1 mm	6000 mm	0,111
14 x 2 mm	6000 mm	0,204
14 x 3 mm	6000 mm	0,281
15 x 1 mm	6000 mm	0,119
15 x 1,5 mm	6000 mm	0,172
15 x 2 mm	6000 mm	0,221
15 x 2,5 mm	6000 mm	0,266
16 x 1 mm	6000 mm	0,128
16 x 1,5 mm	6000 mm	0,185
16 x 2 mm	6000 mm	0,238
16 x 2,5 mm	6000 mm	0,287
16 x 3 mm	6000 mm	0,332
16 x 4 mm	6000 mm	0,408
16 x 5 mm	6000 mm	0,468
18 x 1 mm	6000 mm	0,145
18 x 1,5 mm	6000 mm	0,210
18 x 2 mm	6000 mm	0,272
18 x 3 mm	6000 mm	0,383
19 x 1 mm	6000 mm	0,153
19 x 1,5 mm	6000 mm	0,223
20 x 1 mm	6000 mm	0,162
20 x 1,2 mm	6000 mm	0,192
20 x 1,5 mm	6000 mm	0,236
20 x 2 mm	6000 mm	0,306
20 x 2,5 mm	6000 mm	0,372
20 x 3 mm	6000 mm	0,434
20 x 4 mm	6000 mm	0,544
20 x 5 mm	6000 mm	0,638
21 x 3 mm	6000 mm	0,459
22 x 1 mm	6000 mm	0,179
22 x 1,5 mm	6000 mm	0,261
22 x 2 mm	6000 mm	0,340
EN AW-6060 T66 (AlMgSi)		

D x S	Länge Length	kg/m
22 x 2,5 mm	6000 mm	0,414
22 x 3 mm	6000 mm	0,485
23 x 1,5 mm	6000 mm	0,274
24 x 1,5 mm	6000 mm	0,287
24 x 2 mm	6000 mm	0,374
25 x 1 mm	6000 mm	0,204
25 x 1,5 mm	6000 mm	0,300
25 x 2 mm	6000 mm	0,391
25 x 2,5 mm	6000 mm	0,478
25 x 3 mm	6000 mm	0,561
25 x 3,5 mm	6000 mm	0,640
25 x 4 mm	6000 mm	0,850
25 x 5 mm	6000 mm	0,850
25 x 6 mm	6000 mm	0,967
26 x 1,5 mm	6000 mm	0,312
26,9 x 2,5 mm	6000 mm	0,519
28 x 1,5 mm	6000 mm	0,338
28 x 2 mm	6000 mm	0,442
28 x 2,5 mm	6000 mm	0,542
28 x 3 mm	6000 mm	0,638
28 x 4 mm	6000 mm	0,816
28 x 5 mm	6000 mm	0,978
30 x 1 mm	6000 mm	0,247
30 x 1,5 mm	6000 mm	0,363
30 x 2 mm	6000 mm	0,476
30 x 2,5 mm	6000 mm	0,584
30 x 3 mm	6000 mm	0,689
30 x 4 mm	6000 mm	0,884
30 x 5 mm	6000 mm	1,063
30 x 7,5 mm	6000 mm	1,434
31 x 2,5 mm	6000 mm	0,606
32 x 1 mm	6000 mm	0,264
32 x 1,5 mm	6000 mm	0,389
32 x 2 mm	6000 mm	0,510
32 x 3 mm	6000 mm	0,740
32 x 5 mm	6000 mm	1,148
33,7 x 3 mm	6000 mm	0,783
34 x 2 mm	6000 mm	0,543
34 x 4 mm	6000 mm	1,020
35 x 1 mm	6000 mm	0,289
35 x 1,5 mm	6000 mm	0,427
35 x 2 mm	6000 mm	0,581
35 x 2,5 mm	6000 mm	0,691
35 x 3 mm	6000 mm	0,816
35 x 4 mm	6000 mm	1,054
35 x 5 mm	6000 mm	1,275
35 x 5,5 mm	6000 mm	1,379
36 x 2 mm	6000 mm	0,578
36 x 4 mm	6000 mm	1,085
36 x 6 mm	6000 mm	1,530
EN AW-6060 T66 (AlMgSi)		

D x S	Länge Length	kg/m
38 x 1,5 mm	6000 mm	0,465
38 x 2 mm	6000 mm	0,610
38 x 3 mm	6000 mm	0,893
38 x 4 mm	6000 mm	1,156
38 x 5 mm	6000 mm	1,403
40 x 1 mm	6000 mm	0,332
40 x 1,5 mm	6000 mm	0,490
40 x 2 mm	6000 mm	0,646
40 x 2,5 mm	6000 mm	0,797
40 x 3 mm	6000 mm	0,944
40 x 4 mm	6000 mm	1,224
40 x 5 mm	6000 mm	1,488
40 x 5 mm	8000 mm	1,488
40 x 8 mm	6000 mm	2,176
40 x 10 mm	6000 mm	2,550
42 x 1,5 mm	6000 mm	0,516
42 x 2 mm	6000 mm	0,720
42 x 2,5 mm	6000 mm	0,839
42 x 3 mm	6000 mm	0,995
42 x 4 mm	6000 mm	1,292
42 x 5 mm	6000 mm	1,573
42 x 6 mm	6000 mm	1,831
42,4 x 2,8 mm	6000 mm	0,942
45 x 1,5 mm	6000 mm	0,555
45 x 2 mm	6000 mm	0,731
45 x 2,5 mm	6000 mm	0,903
45 x 3 mm	6000 mm	1,069
45 x 5 mm	6000 mm	1,696
45 x 7,5 mm	6000 mm	2,386
46 x 3 mm	6000 mm	1,094
48 x 2 mm	6000 mm	0,780
48 x 2 mm	7000 mm	0,780
48 x 2,5 mm	6000 mm	0,965
48 x 3 mm	6000 mm	1,145
48 x 3 mm	7000 mm	1,145
48 x 4 mm	6000 mm	1,493
48 x 5 mm	6000 mm	1,824
48,3 x 4,05 mm	6000 mm	1,520
48,3 x 6 mm	6000 mm	2,153
50 x 1 mm	6000 mm	0,416
50 x 1,5 mm	6000 mm	0,617
50 x 2 mm	6000 mm	0,814
50 x 2,5 mm	6000 mm	1,007
50 x 3 mm	6000 mm	1,196
50 x 3 mm (T4)	6000 mm	1,196
50 x 3,5 mm	6000 mm	1,380
50 x 4 mm	6000 mm	1,561
50 x 5 mm	6000 mm	1,908
50 x 6 mm	6000 mm	2,240
50 x 8 mm	6000 mm	2,850
EN AW-6060 T66 (AlMgSi)		

Rundrohre • Round tubes

EN AW-6060 T66 (AlMgSi)




D x S	Länge Length	kg/m
50 x 10 mm	6000 mm	3,393
54 x 2 mm	6000 mm	0,882
55 x 2 mm	6000 mm	0,899
55 x 2,5 mm	6000 mm	1,113
55 x 5 mm	6000 mm	2,121
56 x 3 mm	6000 mm	1,349
58 x 3 mm	6000 mm	1,400
60 x 1 mm	6000 mm	0,500
60 x 1,5 mm	6000 mm	0,744
60 x 2 mm	500 mm	0,984
60 x 2 mm	2500 mm	0,984
60 x 2 mm	3000 mm	0,984
60 x 2 mm	3500 mm	0,984
60 x 2 mm	6000 mm	0,984
60 x 2 mm	7000 mm	0,984
60 x 2,5 mm	6000 mm	1,219
60 x 3 mm	500 mm	1,450
60 x 3 mm	2500 mm	1,450
60 x 3 mm	3000 mm	1,450
60 x 3 mm	3500 mm	1,450
60 x 3 mm	4000 mm	1,450
60 x 3 mm	6000 mm	1,450
60 x 3 mm	7000 mm	1,450
60 x 3 mm	8000 mm	1,450
60 x 4 mm	6000 mm	1,900
60 x 5 mm	6000 mm	2,333
60 x 6 mm	6000 mm	2,746
60 x 10 mm	6000 mm	4,241
60 x 11 mm	6000 mm	4,572
60 x 15 mm	6000 mm	5,725
60 x 20 mm	6000 mm	6,786
63 x 1,5 mm	6000 mm	0,782
63 x 3 mm	6000 mm	1,527
63 x 8 mm	6000 mm	3,732
65 x 1,5 mm	6000 mm	0,808
65 x 2 mm	6000 mm	1,069
65 x 2,5 mm	6000 mm	1,325
65 x 4 mm	6000 mm	2,070
65 x 5 mm	6000 mm	2,545
65 x 10 mm	6000 mm	4,663
66 x 2,5 mm	6000 mm	1,347
66 x 3 mm	6000 mm	1,603
70 x 2 mm	6000 mm	1,154
70 x 2,5 mm	6000 mm	1,431
70 x 3 mm	6000 mm	1,705
70 x 4 mm	6000 mm	2,239
70 x 5 mm	6000 mm	2,757
70 x 7 mm	6000 mm	3,741
70 x 10 mm	6000 mm	5,089
70 x 15 mm	6000 mm	6,994
EN AW-6060 T66 (AlMgSi)		

D x S	Länge Length	kg/m
72 x 4 mm	6000 mm	2,307
75 x 2 mm	6000 mm	1,238
75 x 2,5 mm	6000 mm	1,537
75 x 3 mm	6000 mm	1,832
75 x 5 mm	6000 mm	2,969
75 x 10 mm	6000 mm	5,511
76 x 2 mm	6000 mm	1,255
76 x 2,5 mm	6000 mm	1,559
76 x 3 mm	3000 mm	1,858
76 x 3 mm	4000 mm	1,858
76 x 3 mm	6000 mm	1,858
76 x 3 mm	7000 mm	1,858
76 x 4 mm	6000 mm	2,443
78 x 5 mm	6000 mm	3,096
80 x 1,5 mm	6000 mm	0,999
80 x 2 mm	6000 mm	1,323
80 x 2,5 mm	6000 mm	1,643
80 x 3 mm	6000 mm	1,959
80 x 4 mm	6000 mm	2,579
80 x 5 mm	6000 mm	3,181
80 x 6 mm	6000 mm	3,766
80 x 8 mm	6000 mm	4,886
80 x 10 mm	6000 mm	5,937
80 x 15 mm	6000 mm	8,270
84 x 2 mm	6000 mm	1,391
85 x 3 mm	6000 mm	2,087
85 x 5 mm	6000 mm	3,393
86 x 3 mm	6000 mm	2,112
89 x 2 mm	6000 mm	1,476
89 x 3 mm	6000 mm	2,188
90 x 1,5 mm	6000 mm	1,126
90 x 2 mm	6000 mm	1,493
90 x 3 mm	6000 mm	2,214
90 x 3 mm	7000 mm	2,214
90 x 4 mm	6000 mm	2,918
90 x 5 mm	6000 mm	3,605
90 x 6 mm	6000 mm	4,275
90 x 10 mm	3000 mm	6,786
90 x 10 mm	6000 mm	6,786
90 x 15 mm	3000 mm	9,544
90 x 20 mm	6000 mm	11,875
90 x 25 mm	6000 mm	13,783
95 x 2,5 mm	6000 mm	1,961
96 x 14,5 mm	6000 mm	10,024
100 x 1,5 mm	6000 mm	1,253
100 x 2 mm	6000 mm	1,682
100 x 2,5 mm	6000 mm	2,067
100 x 3 mm	6000 mm	2,468
100 x 4 mm	4000 mm	3,257
100 x 4 mm	6000 mm	3,257
EN AW-6060 T66 (AlMgSi)		

D x S	Länge Length	kg/m
100 x 4 mm	8000 mm	3,257
100 x 5 mm	6000 mm	4,029
100 x 6 mm	6000 mm	4,784
100 x 10 mm	6000 mm	7,634
100 x 15 mm	6000 mm	10,816
100 x 20 mm	6000 mm	13,571
105 x 2,5 mm	6000 mm	2,174
106 x 3 mm	6000 mm	2,621
108 x 2,5 mm	6000 mm	2,237
108 x 3 mm	6000 mm	2,672
108 x 4 mm	6000 mm	3,529
108 x 5 mm	6000 mm	4,368
110 x 2,5 mm	6000 mm	2,280
110 x 3 mm	3000 mm	2,723
110 x 3 mm	6000 mm	2,723
110 x 5 mm	6000 mm	4,453
110 x 10 mm	6000 mm	8,482
114,3 x 3 mm	6000 mm	2,825
114,3 x 6 mm	6000 mm	5,497
115 x 5 mm	6000 mm	4,665
120 x 2 mm	6000 mm	2,002
120 x 3 mm	6000 mm	2,977
120 x 3 mm	8000 mm	2,977
120 x 3 mm	8500 mm	2,977
120 x 3 mm	10000 mm	2,977
120 x 3 mm	12000 mm	2,977
120 x 4 mm	6000 mm	3,936
120 x 5 mm	6000 mm	4,877
120 x 8 mm	6000 mm	7,600
120 x 10 mm	6000 mm	9,330
120 x 15 mm	6000 mm	13,359
125 x 2,5 mm	6000 mm	2,598
125 x 4 mm	6000 mm	4,105
125 x 5 mm	6000 mm	5,087
125 x 6 mm	6000 mm	6,056
125 x 10 mm	6000 mm	9,754
130 x 2 mm	6000 mm	2,171
130 x 2,5 mm	6000 mm	2,704
130 x 3 mm	6000 mm	3,232
130 x 5 mm	6000 mm	5,301
130 x 10 mm	6000 mm	10,178
130 x 15 mm	6000 mm	14,631
133 x 3 mm	6000 mm	3,308
133 x 4 mm	6000 mm	4,377
135 x 5 mm	6000 mm	5,510
140 x 3 mm	6000 mm	3,486
140 x 4 mm	6000 mm	4,614
140 x 5 mm	6000 mm	5,725
140 x 10 mm	6000 mm	11,027
145 x 4 mm	6000 mm	4,780
EN AW-6060 T66 (AlMgSi)		

Rundrohre • Round tubes

EN AW-6060 T66 (AlMgSi)



D x S	Länge Length	kg/m
150 x 2 mm	8000 mm	2,500
150 x 2 mm	9000 mm	2,500
150 x 2 mm	11000 mm	2,500
150 x 3 mm	8000 mm	3,704
150 x 5 mm	8000 mm	6,250
150 x 10 mm	3000 mm	11,875
150 x 10 mm	6000 mm	11,875
150 x 20 mm	6000 mm	22,040
156 x 3 mm	6000 mm	3,893
160 x 3 mm	6000 mm	3,995
160 x 3 mm	8000 mm	3,995
160 x 3 mm	12000 mm	3,995
160 x 4 mm	6000 mm	5,293
160 x 5 mm	6000 mm	6,574
160 x 10 mm	6000 mm	12,725
165 x 2 mm	6000 mm	2,764
168 x 3,4 mm	6000 mm	4,747
168 x 4 mm	6000 mm	5,562
170 x 2,5 mm	6000 mm	3,552
170 x 5 mm	6000 mm	6,998
EN AW-6060 T66 (AlMgSi)		

D x S	Länge Length	kg/m
170 x 10 mm	6000 mm	13,585
180 x 3 mm	6000 mm	4,504
180 x 3 mm	10000 mm	4,504
180 x 5 mm	6000 mm	7,422
180 x 5 mm	10000 mm	7,422
180 x 10 mm	6000 mm	14,422
180 x 20 mm	5000 mm	27,147
190 x 3 mm	6000 mm	4,758
200 x 3 mm	6000 mm	5,013
200 x 3 mm	10000 mm	5,013
200 x 3 mm	12050 mm	5,013
200 x 5 mm	6000 mm	8,270
200 x 5 mm	11000 mm	8,270
200 x 8 mm	6000 mm	13,028
206 x 3 mm	6000 mm	5,186
208 x 4 mm	6000 mm	6,921
210 x 5 mm	6000 mm	8,694
219 x 4 mm	6000 mm	7,295
219 x 4 mm	12000 mm	7,295
220 x 5 mm	6000 mm	9,118
EN AW-6060 T66 (AlMgSi)		

D x S	Länge Length	kg/m
230 x 5 mm	6000 mm	9,542
240 x 5 mm	6000 mm	9,966
250 x 5 mm	6000 mm	10,390
250 x 5 mm	10000 mm	10,390
250 x 5 mm	11000 mm	10,390
260 x 5 mm	6000 mm	10,810
273 x 4,5 mm	6000 mm	10,250
273 x 4,5 mm	12050 mm	10,250
300 x 4 mm	6000 mm	10,043
300 x 4 mm	12000 mm	10,043
300 x 8 mm	6050 mm	19,810
323,9 x 5,5 mm	6000 mm	14,856
323,9 x 5,5 mm	12000 mm	14,856
355 x 6 mm	6000 mm	17,760
EN AW-6060 T66 (AlMgSi)		

EN AW-1050A (Al99,5)

D x S	Info	Länge Length	kg/m
140 x 2 mm	gezogen • drawn	6000 mm	2,439
EN AW-1050A (Al99,5)			

EN AW-2024 (AlCu4Mg1)


D x S	Info	Länge Length	kg/m
12 x 1 mm (T3)	gezogen • drawn	6000 mm	0,090
14 x 1 mm (T3)	gezogen • drawn	6000 mm	0,110
30 x 3 mm (T3)	gezogen • drawn	6000 mm	0,687
EN AW-2024 T4 (AlCu4Mg1)			

EN AW-5005 T4 (AlMg1)

D x S	Länge Length	kg/m
50 x 6 mm	6000 mm	2,222
EN AW-5005 T4 (AlMg1)		

Rundrohre • Round tubes

EN AW-5083 (AlMg4,5Mn)



D x S	Info	Länge Length	kg/m
21,3 x 2,77 mm	gezogen • drawn	6000 mm	0,435
26,67 x 2,87 mm	gezogen • drawn	6000 mm	0,579
33,4 x 3,38 mm	gezogen • drawn	6000 mm	0,860
42,16 x 3,56 mm	nahtlos gepresst • seamless extruded	6000 mm	1,166
48,26 x 3,68 mm	nahtlos gepresst • seamless extruded	6000 mm	1,392
60 x 6 mm	nahtlos gepresst • seamless extruded	6000 mm	3,530
60,3 x 3,91 mm	nahtlos gepresst • seamless extruded	6000 mm	1,869
60,3 x 5,54 mm	nahtlos gepresst • seamless extruded	6000 mm	2,570
73,03 x 5,16 mm	nahtlos gepresst • seamless extruded	6000 mm	2,970
73,03 x 7,01 mm	nahtlos gepresst • seamless extruded	6000 mm	3,930
88,9 x 5,49 mm	nahtlos gepresst • seamless extruded	6000 mm	3,890
88,9 x 7,62 mm	nahtlos gepresst • seamless extruded	6000 mm	5,250
101,6 x 5,74 mm	nahtlos gepresst • seamless extruded	6000 mm	4,660
101,6 x 8,08 mm	nahtlos gepresst • seamless extruded	6000 mm	6,410
114,3 x 6,02 mm	nahtlos gepresst • seamless extruded	6000 mm	5,526
114,3 x 8,56 mm	nahtlos gepresst • seamless extruded	6000 mm	7,670
141,3 x 6,55 mm	nahtlos gepresst • seamless extruded	6000 mm	7,483
168,3 x 7,11 mm	nahtlos gepresst • seamless extruded	6000 mm	9,716
168,3 x 10,97 mm	nahtlos gepresst • seamless extruded	6000 mm	14,630
219,1 x 3,76 mm	nahtlos gepresst • seamless extruded	6000 mm	6,864
219,1 x 8,18 mm	nahtlos gepresst • seamless extruded	6000 mm	14,627
219,1 x 12,7 mm	nahtlos gepresst • seamless extruded	6000 mm	22,220
273,1 x 9,27 mm	nahtlos gepresst • seamless extruded	4000 mm	20,730
273,1 x 15,08 mm	nahtlos gepresst • seamless extruded	3000 mm	32,990
EN AW-5083 (AlMg4,5Mn)			

EN AW-5754 (AlMg3)


D x S	Info	Länge Length	kg/m
25 x 5 mm	gezogen • drawn	6000 mm	0,848
31 x 3 mm	gezogen • drawn	6000 mm	0,712
35 x 3 mm	gezogen • drawn	3000 mm	0,813
45 x 5 mm	gepresst • extruded	6000 mm	1,895
60 x 5 mm	gepresst • extruded	6000 mm	2,331
65 x 5 mm	gepresst • extruded	6000 mm	2,564
80 x 5 mm	gepresst • extruded	6000 mm	3,226
82 x 4 mm	gezogen • drawn	6000 mm	2,632
90 x 5 mm	gepresst • extruded	6000 mm	3,571
100 x 4 mm	gepresst • extruded	3000 mm	3,260
100 x 10 mm	gepresst • extruded	6000 mm	7,692
110 x 5 mm	gepresst • extruded	6000 mm	4,450
EN AW-5754 (AlMg3)			

EN AW-6101B T6 (EAlSiMg(B))

D x S	Länge Length	kg/m
50 x 5 mm	6000 mm	1,908
75 x 5 mm	12000 mm	2,941
100 x 6 mm	3700 mm	4,782
100 x 6 mm	10000 mm	4,782
100 x 6 mm	11000 mm	4,782
120 x 8 mm	6340 mm	7,692
120 x 8 mm	7125 mm	7,692
160 x 6 mm	9000 mm	7,840
250 x 6 mm	18050 mm	12,500
EN AW-6101B T6 (EAlSiMg(B))		

Rundrohre • Round tubes

EN AW-6082 T6 (AlSi1MgMn)



D x S	Länge Length	kg/m
30 x 5 mm	6000 mm	1,059
35 x 5 mm	6000 mm	1,272
40 x 5 mm	6000 mm	1,480
40 x 10 mm	6000 mm	2,553
45 x 5 mm	6000 mm	1,702
60 x 5 mm	6000 mm	2,326
60 x 8 mm	6000 mm	3,540
60 x 10 mm	6000 mm	4,242
70 x 10 mm	6000 mm	5,100
80 x 5 mm	6000 mm	3,179
80 x 10 mm	6000 mm	5,957
80 x 15 mm	6000 mm	8,300
80 x 20 mm	6000 mm	10,211
90 x 5 mm	6000 mm	3,616
90 x 10 mm	6000 mm	6,667
90 x 15 mm	3000 mm	9,544
100 x 10 mm	6000 mm	7,630
100 x 15 mm	6000 mm	10,849
100 x 20 mm	6000 mm	14,286
110 x 10 mm	6000 mm	8,478
110 x 15 mm	6050 mm	12,061
110 x 20 mm	6050 mm	15,317
120 x 15 mm	6050 mm	13,353
EN AW-6082 T6 (AlSi1MgMn)		


D x S	Länge Length	kg/m
120 x 20 mm	6050 mm	17,019
130 x 10 mm	6050 mm	10,174
140 x 10 mm	6050 mm	11,062
140 x 15 mm	6050 mm	15,896
140 x 20 mm	6050 mm	20,350
140 x 30 mm	6050 mm	27,977
150 x 10 mm	6050 mm	11,869
150 x 15 mm	6050 mm	17,167
150 x 20 mm	6000 mm	22,040
150 x 25 mm	6050 mm	26,494
160 x 10 mm	6050 mm	12,720
160 x 15 mm	6050 mm	18,440
160 x 20 mm	5000 mm	23,750
170 x 5 mm	6050 mm	7,143
170 x 10 mm	6050 mm	13,565
170 x 15 mm	6050 mm	19,711
180 x 5 mm	6050 mm	7,446
180 x 15 mm	6050 mm	20,980
180 x 20 mm	5000 mm	27,130
180 x 40 mm	6050 mm	47,477
190 x 5 mm	6050 mm	7,840
200 x 30 mm	3050 mm	43,238
200 x 50 mm	3050 mm	63,585
EN AW-6082 T6 (AlSi1MgMn)		

D x S	Länge Length	kg/m
210 x 10 mm	3050 mm	16,956
210 x 20 mm	3050 mm	32,216
220 x 10 mm	6050 mm	17,800
220 x 15 mm	3050 mm	26,070
220 x 20 mm	3050 mm	33,910
220 x 25 mm	3050 mm	41,330
220 x 30 mm	3050 mm	48,320
230 x 15 mm	3050 mm	27,340
240 x 20 mm	3050 mm	37,300
240 x 30 mm	3050 mm	53,410
240 x 50 mm	3050 mm	80,540
250 x 10 mm	3050 mm	20,360
260 x 10 mm	3050 mm	21,200
260 x 30 mm	3050 mm	56,500
280 x 15 mm	3050 mm	33,700
280 x 30 mm	3050 mm	63,590
285 x 25 mm	4000 mm	55,110
300 x 20 mm	3050 mm	47,480
310 x 30 mm	3050 mm	71,250
330 x 15 mm	3050 mm	40,060
350 x 10 mm	3000 mm	28,830
EN AW-6082 T6 (AlSi1MgMn)		

Rundrohre eloxiert A6/C0 15 µ • Round tubes anodized A6/C0 15 µ

EN AW-6060 T66 (AlMgSi)

D x S	Länge Length	kg/m
19 x 1 mm	3000 mm	0,153
EN AW-6060 T66 (AlMgSi)		



Ovalrohre • Oval tubes


EN AW-6060 T66 (AlMgSi)

A x B x S	Länge Length	kg/m
22 x 12 x 2 mm	6000 mm	0,280
26 x 17 x 2 mm	6000 mm	0,360
26 x 17 x 3 mm	6000 mm	0,500
30 x 18,5 x 2,25 mm	6000 mm	0,450
40 x 20 x 2 mm	6000 mm	0,521
42 x 22 x 1,4 mm	6000 mm	0,423
45 x 15 x 2 mm	6000 mm	0,550
45 x 23 x 2 mm	6000 mm	0,594
EN AW-6060 T66 (AlMgSi)		

A x B x S	Länge Length	kg/m
50 x 25 x 2 mm	6000 mm	0,660
50 x 30 x 1,5 mm	6000 mm	0,530
60 x 10 x 1,3 mm	6000 mm	0,430
80 x 26 x 1,5 mm	6000 mm	0,752
110 x 26 x 3 mm	6000 mm	1,945
160 x 80 x 3 mm	6000 mm	3,255
EN AW-6060 T66 (AlMgSi)		

Formrohre • Rectangular / Square tubes

EN AW-6060 T66 (AlMgSi)

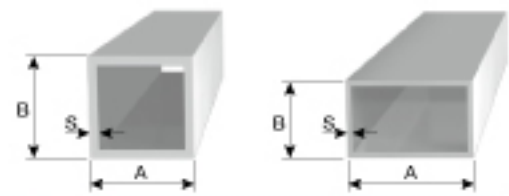

A x B x S	Länge Length	kg/m
10 x 10 x 1 mm	6000 mm	0,097
10 x 10 x 1,5 mm	6000 mm	0,138
12 x 12 x 1 mm	6000 mm	0,119
12 x 12 x 2 mm	6000 mm	0,216
14 x 14 x 1 mm	6000 mm	0,140
15 x 10 x 1,5 mm	6000 mm	0,178
15 x 15 x 1 mm	6000 mm	0,151
15 x 15 x 1,5 mm	6000 mm	0,219
15 x 15 x 2 mm	6000 mm	0,281
16 x 16 x 1 mm	6000 mm	0,162
16 x 16 x 4 mm	6000 mm	0,518
18 x 15 x 2 mm	6000 mm	0,313
18 x 18 x 1,5 mm	6000 mm	0,267
18 x 18 x 2 mm	6000 mm	0,348
20 x 10 x 1 mm	6000 mm	0,151
20 x 10 x 1,5 mm	6000 mm	0,219
20 x 10 x 2 mm	6000 mm	0,281
20 x 15 x 1,5 mm	6000 mm	0,259
20 x 15 x 2 mm	6000 mm	0,335
20 x 20 x 1,5 mm	6000 mm	0,300
20 x 20 x 2 mm	6000 mm	0,389
20 x 20 x 2,5 mm	6000 mm	0,473
20 x 20 x 3 mm	6000 mm	0,551
25 x 10 x 1,5 mm	6000 mm	0,259
25 x 10 x 2 mm	6000 mm	0,335
25 x 15 x 1,5 mm	6000 mm	0,300
25 x 15 x 2 mm	6000 mm	0,389
25 x 20 x 2 mm	6000 mm	0,443
25 x 25 x 1,5 mm	6000 mm	0,381
25 x 25 x 2 mm	6000 mm	0,497
25 x 25 x 2,5 mm	6000 mm	0,608
25 x 25 x 3 mm	6000 mm	0,713
25 x 25 x 4 mm	6000 mm	0,907
30 x 10 x 1,5 mm	6000 mm	0,300
30 x 10 x 2 mm	6000 mm	0,389
30 x 15 x 1,5 mm	6000 mm	0,340
30 x 15 x 2 mm	6000 mm	0,443
30 x 15 x 3 mm	6000 mm	0,632
30 x 20 x 1,5 mm	6000 mm	0,381
30 x 20 x 2 mm	6000 mm	0,497
30 x 20 x 3 mm	6000 mm	0,713
30 x 25 x 2 mm	6000 mm	0,551
30 x 25 x 2,5 mm	6000 mm	0,675
30 x 30 x 1,5 mm	6000 mm	0,462
30 x 30 x 2 mm	6000 mm	0,605
30 x 30 x 2,5 mm	6000 mm	0,743
30 x 30 x 3 mm	6000 mm	0,875
30 x 30 x 4 mm	6000 mm	1,123
34 x 20 x 2 mm	6000 mm	0,540
34 x 34 x 2 mm	6000 mm	0,691

EN AW-6060 T66 (AlMgSi)

A x B x S	Länge Length	kg/m
34 x 34 x 3 mm	6000 mm	1,004
35 x 15 x 1,5 mm	6000 mm	0,381
35 x 15 x 2 mm	6000 mm	0,497
35 x 20 x 2 mm	6000 mm	0,551
35 x 25 x 1,5 mm	6000 mm	0,462
35 x 25 x 2 mm	6000 mm	0,605
35 x 35 x 2 mm	6000 mm	0,713
35 x 35 x 3 mm	6000 mm	1,037
40 x 10 x 1,5 mm	6000 mm	0,382
40 x 10 x 2 mm	6000 mm	0,497
40 x 15 x 1,5 mm	6000 mm	0,421
40 x 15 x 2 mm	6000 mm	0,551
40 x 20 x 1,2 mm	6000 mm	0,374
40 x 20 x 1,5 mm	6000 mm	0,462
40 x 20 x 2 mm	6000 mm	0,605
40 x 20 x 2,5 mm	6000 mm	0,743
40 x 20 x 3 mm	6000 mm	0,875
40 x 20 x 4 mm	6000 mm	1,123
40 x 25 x 1,5 mm	6000 mm	0,502
40 x 25 x 2 mm	6000 mm	0,659
40 x 25 x 2,5 mm	6000 mm	0,810
40 x 25 x 3 mm	6000 mm	0,956
40 x 30 x 1,5 mm	6000 mm	0,543
40 x 30 x 2 mm	6000 mm	0,713
40 x 30 x 2,5 mm	6000 mm	0,878
40 x 30 x 3 mm	6000 mm	1,037
40 x 30 x 4 mm	6000 mm	1,339
40 x 40 x 1,5 mm	6000 mm	0,624
40 x 40 x 2 mm	6000 mm	0,821
40 x 40 x 2 mm	6500 mm	0,821
40 x 40 x 2,5 mm	6000 mm	1,013
40 x 40 x 3 mm	6000 mm	1,199
40 x 40 x 4 mm	6000 mm	1,555
40 x 40 x 5 mm	6000 mm	1,890
45 x 20 x 2 mm	6000 mm	0,659
45 x 25 x 2 mm	6000 mm	0,713
45 x 25 x 3 mm	6000 mm	1,037
45 x 45 x 2 mm	6000 mm	0,929
45 x 45 x 3 mm	6000 mm	1,361
50 x 10 x 2 mm	6000 mm	0,605
50 x 15 x 2 mm	6000 mm	0,659
50 x 20 x 1,5 mm	6000 mm	0,543
50 x 20 x 2 mm	6000 mm	0,713
50 x 20 x 3 mm	6000 mm	1,037
50 x 20 x 4 mm	6000 mm	1,339
50 x 25 x 1,5 mm	6000 mm	0,583
50 x 25 x 2 mm	6000 mm	0,767
50 x 25 x 2,5 mm	6000 mm	0,945
50 x 25 x 3 mm	6000 mm	1,118
50 x 30 x 1,8 mm	6000 mm	0,743


EN AW-6060 T66 (AlMgSi)

A x B x S	Länge Length	kg/m
50 x 30 x 2 mm	6000 mm	0,821
50 x 30 x 2,5 mm	6000 mm	1,013
50 x 30 x 3 mm	6000 mm	1,199
50 x 40 x 2 mm	6000 mm	0,929
50 x 40 x 2,5 mm	6000 mm	1,148
50 x 40 x 3 mm	6000 mm	1,361
50 x 40 x 4 mm	6000 mm	1,771
50 x 45 x 2 mm	6000 mm	0,983
50 x 50 x 1,5 mm	6000 mm	0,786
50 x 50 x 2 mm	6000 mm	1,037
50 x 50 x 2 mm	8000 mm	1,037
50 x 50 x 2,5 mm	6000 mm	1,283
50 x 50 x 3 mm	6000 mm	1,523
50 x 50 x 4 mm	6000 mm	1,987
50 x 50 x 5 mm	6000 mm	2,430
55 x 50 x 3 mm	6000 mm	1,613
55 x 55 x 2 mm	6000 mm	1,145
60 x 10 x 2 mm	6000 mm	0,713
60 x 20 x 1,5 mm	6000 mm	0,624
60 x 20 x 2 mm	6000 mm	0,821
60 x 20 x 3 mm	6000 mm	1,199
60 x 20 x 4 mm	6000 mm	1,555
60 x 25 x 2 mm	6000 mm	0,875
60 x 25 x 3 mm	6000 mm	1,280
60 x 30 x 2 mm	6000 mm	0,929
60 x 30 x 2,5 mm	6000 mm	1,148
60 x 30 x 3 mm	6000 mm	1,361
60 x 30 x 4 mm	6000 mm	1,771
60 x 40 x 1,5 mm	6000 mm	0,788
60 x 40 x 2 mm	6000 mm	1,037
60 x 40 x 2,5 mm	6000 mm	1,283
60 x 40 x 3 mm	6000 mm	1,523
60 x 40 x 4 mm	3600 mm	1,987
60 x 40 x 4 mm	6000 mm	1,987
60 x 40 x 4 mm	6120 mm	1,987
60 x 50 x 3 mm	6000 mm	1,685
60 x 50 x 4 mm	6000 mm	2,203
60 x 60 x 1,5 mm	6000 mm	0,948
60 x 60 x 2 mm	6000 mm	1,253
60 x 60 x 2,5 mm	6000 mm	1,553
60 x 60 x 3 mm	6000 mm	1,847
60 x 60 x 4 mm	6000 mm	2,419
60 x 60 x 5 mm	6000 mm	2,970
65 x 65 x 2,5 mm	6000 mm	1,688
70 x 20 x 2 mm	6000 mm	0,929
70 x 25 x 2,5 mm	6000 mm	1,215
70 x 30 x 2 mm	6000 mm	1,037
70 x 30 x 3 mm	6000 mm	1,523
70 x 35 x 2 mm	6000 mm	1,091
70 x 40 x 3 mm	6000 mm	1,685

EN AW-6060 T66 (AlMgSi)

Formrohre • Rectangular / Square tubes

EN AW-6060 T66 (AlMgSi)

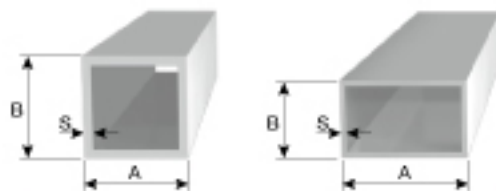



A x B x S	Länge Length	kg/m
70 x 40 x 4 mm	6000 mm	2,203
70 x 50 x 2 mm	6000 mm	1,253
70 x 50 x 4 mm	6000 mm	2,419
70 x 70 x 2 mm	6000 mm	1,469
70 x 70 x 3 mm	6000 mm	2,171
70 x 70 x 4 mm	6000 mm	2,851
75 x 50 x 3 mm	6000 mm	1,928
80 x 10 x 2 mm	6000 mm	0,929
80 x 15 x 1,5 mm	6000 mm	0,745
80 x 18 x 2 mm	6000 mm	1,015
80 x 20 x 1,3 mm	6000 mm	0,684
80 x 20 x 1,5 mm	6000 mm	0,786
80 x 20 x 2 mm	6000 mm	1,037
80 x 20 x 2,5 mm	6000 mm	1,283
80 x 25 x 2 mm	6000 mm	1,091
80 x 25 x 2,5 mm	6000 mm	1,350
80 x 30 x 2 mm	6000 mm	1,145
80 x 30 x 3 mm	6000 mm	1,685
80 x 30 x 4 mm	6000 mm	2,203
80 x 40 x 2 mm	6000 mm	1,253
80 x 40 x 2,5 mm	6000 mm	1,553
80 x 40 x 3 mm	6000 mm	1,847
80 x 40 x 4 mm	6000 mm	2,419
80 x 50 x 2 mm	6000 mm	1,361
80 x 50 x 3 mm	6000 mm	2,009
80 x 50 x 4 mm	6000 mm	2,635
80 x 50 x 5 mm	6000 mm	3,240
80 x 60 x 2 mm	6000 mm	1,469
80 x 60 x 2,5 mm	6000 mm	1,823
80 x 60 x 3 mm	6000 mm	2,171
80 x 60 x 3 mm	8000 mm	2,171
80 x 60 x 4 mm	6000 mm	2,851
80 x 80 x 2 mm	6000 mm	1,685
80 x 80 x 3 mm	6000 mm	2,495
80 x 80 x 4 mm	6000 mm	3,283
80 x 80 x 5 mm	6000 mm	4,050
80 x 80 x 6 mm	6000 mm	4,795
80 x 80 x 8 mm	6000 mm	6,221
90 x 40 x 3 mm	6000 mm	2,009
90 x 90 x 2,5 mm	6000 mm	2,363
90 x 90 x 4 mm	6000 mm	3,715
100 x 18 x 2 mm	6000 mm	1,231
100 x 18 x 4 mm	6000 mm	2,376
100 x 20 x 1,2 mm	6000 mm	0,762
100 x 20 x 1,6 mm	6000 mm	1,009
100 x 20 x 2 mm	6000 mm	1,253
100 x 20 x 3 mm	6000 mm	1,847
100 x 20 x 4 mm	6000 mm	2,419
100 x 25 x 2 mm	6000 mm	1,307
100 x 30 x 2 mm	6000 mm	1,361
EN AW-6060 T66 (AlMgSi)		

A x B x S	Länge Length	kg/m
100 x 30 x 3 mm	6000 mm	2,009
100 x 40 x 2 mm	6000 mm	1,469
100 x 40 x 2,5 mm	6000 mm	1,823
100 x 40 x 3 mm	6000 mm	2,171
100 x 40 x 4 mm	6000 mm	2,851
100 x 50 x 2 mm	6000 mm	1,577
100 x 50 x 2 mm	8000 mm	1,577
100 x 50 x 3 mm	6000 mm	2,333
100 x 50 x 4 mm	6000 mm	3,067
100 x 50 x 5 mm	6000 mm	3,780
100 x 60 x 2 mm	6000 mm	1,685
100 x 60 x 2,5 mm	6000 mm	2,093
100 x 60 x 3 mm	6000 mm	2,495
100 x 60 x 4 mm	6000 mm	3,283
100 x 60 x 5 mm	6000 mm	4,050
100 x 75 x 2,5 mm	6000 mm	2,295
100 x 80 x 3 mm	6000 mm	2,819
100 x 80 x 4 mm	6000 mm	3,715
100 x 100 x 2 mm	6000 mm	2,117
100 x 100 x 2,5 mm	6000 mm	2,633
100 x 100 x 3 mm	6000 mm	3,143
100 x 100 x 4 mm	6000 mm	4,147
100 x 100 x 5 mm	6000 mm	5,130
100 x 100 x 6 mm	6000 mm	6,091
100 x 100 x 10 mm	6000 mm	9,720
110 x 50 x 2,5 mm	6000 mm	2,093
110 x 110 x 2 mm	6000 mm	2,333
110 x 110 x 4 mm	6000 mm	4,579
120 x 18 x 2 mm	6000 mm	1,447
120 x 20 x 1,5 mm	6000 mm	1,110
120 x 20 x 2 mm	6000 mm	1,540
120 x 30 x 2 mm	6000 mm	1,577
120 x 30 x 3 mm	6000 mm	2,333
120 x 40 x 2 mm	6000 mm	1,685
120 x 40 x 2,5 mm	6000 mm	2,093
120 x 40 x 4 mm	6000 mm	3,283
120 x 50 x 2 mm	6000 mm	1,793
120 x 50 x 3 mm	6000 mm	2,657
120 x 50 x 4 mm	6000 mm	3,499
120 x 60 x 2 mm	6000 mm	1,901
120 x 60 x 3 mm	6000 mm	2,819
120 x 60 x 4 mm	6000 mm	3,715
120 x 80 x 3 mm	6000 mm	3,143
120 x 80 x 4 mm	6000 mm	4,147
120 x 100 x 3 mm	6000 mm	3,467
120 x 120 x 2 mm	6000 mm	2,549
120 x 120 x 2,5 mm	6000 mm	3,173
120 x 120 x 4 mm	6000 mm	5,011
120 x 120 x 5 mm	6000 mm	6,210
120 x 120 x 5 mm	10000 mm	6,210
EN AW-6060 T66 (AlMgSi)		

A x B x S	Länge Length	kg/m
130 x 30 x 3 mm	6000 mm	2,495
130 x 50 x 4 mm	6000 mm	3,715
130 x 130 x 5 mm	6000 mm	6,750
140 x 18 x 2 mm	6000 mm	1,663
140 x 20 x 3 mm	6000 mm	2,495
140 x 40 x 4 mm	6000 mm	3,715
140 x 60 x 2,5 mm	6000 mm	2,633
140 x 80 x 4 mm	6000 mm	4,579
140 x 80 x 6 mm	6000 mm	6,739
145 x 145 x 3 mm	6000 mm	4,601
150 x 18 x 2 mm	6000 mm	1,771
150 x 20 x 1,8 mm	6000 mm	1,617
150 x 30 x 3 mm	6000 mm	2,819
150 x 40 x 2,5 mm	6000 mm	2,498
150 x 40 x 4 mm	6000 mm	3,931
150 x 50 x 2 mm	6000 mm	2,117
150 x 50 x 3 mm	6000 mm	3,143
150 x 50 x 4 mm	6000 mm	4,147
150 x 50 x 6 mm	6000 mm	6,091
150 x 60 x 3 mm	6000 mm	3,305
150 x 60 x 4 mm	6000 mm	4,363
150 x 60 x 5 mm	6000 mm	5,400
150 x 80 x 4 mm	6000 mm	4,795
150 x 100 x 3 mm	6000 mm	3,953
150 x 150 x 3 mm	6000 mm	4,763
150 x 150 x 4 mm	6000 mm	6,307
150 x 150 x 5 mm	6000 mm	7,830
160 x 40 x 4 mm	6000 mm	4,147
160 x 50 x 4 mm	6000 mm	4,363
160 x 60 x 4 mm	6000 mm	4,579
160 x 60 x 5 mm	6000 mm	5,670
160 x 80 x 4 mm	6000 mm	5,011
160 x 90 x 5 mm	6000 mm	6,480
170 x 25 x 1,8 mm	6000 mm	1,860
170 x 70 x 4 mm	6000 mm	5,011
180 x 18 x 2 mm	6000 mm	2,095
180 x 40 x 4 mm	6000 mm	4,579
180 x 50 x 3 mm	6000 mm	3,629
180 x 50 x 4 mm	6000 mm	4,795
180 x 60 x 3 mm	6000 mm	3,791
180 x 60 x 4 mm	6000 mm	5,011
180 x 80 x 4 mm	6000 mm	5,443
200 x 18 x 2 mm	6000 mm	2,311
200 x 20 x 2 mm	6000 mm	2,333
200 x 30 x 2,8 mm	6000 mm	3,393
200 x 35 x 2 mm	6000 mm	2,495
200 x 40 x 3 mm	6000 mm	3,791
200 x 50 x 2,5 mm	6000 mm	3,308
200 x 50 x 4 mm	6000 mm	5,227
200 x 60 x 4 mm	6000 mm	5,443
EN AW-6060 T66 (AlMgSi)		

Formrohre • Rectangular / Square tubes

EN AW-6060 T66 (AlMgSi)




A x B x S	Länge Length	kg/m
200 x 80 x 4 mm	6000 mm	5,875
200 x 100 x 2,2 mm	6000 mm	3,512
200 x 100 x 4 mm	6000 mm	6,307
200 x 100 x 5 mm	6000 mm	7,830
EN AW-6060 T66 (AlMgSi)		

A x B x S	Länge Length	kg/m
240 x 100 x 5 mm	6000 mm	8,910
250 x 50 x 3 mm	6000 mm	4,763
250 x 100 x 4 mm	6000 mm	7,387
EN AW-6060 T66 (AlMgSi)		

Formrohre mit Ecken-Radius

Rectangular / Square tubes with round corners

EN AW-6060 T66 (AlMgSi)



A x B x S	Radius	Länge Length	kg/m
20 x 20 x 1,5 mm	1 mm	6000 mm	0,300
20 x 20 x 2 mm	2 mm	6000 mm	0,380
25 x 25 x 2 mm	2 mm	6000 mm	0,488
30 x 10 x 2 mm	2 mm	6000 mm	0,380
30 x 20 x 2 mm	2 mm	6000 mm	0,488
30 x 30 x 2,5 mm	5 mm	6000 mm	0,704
30 x 30 x 2 mm	2 mm	6000 mm	0,596
30 x 30 x 2 mm	3 mm	6000 mm	0,584
30 x 30 x 3 mm	3 mm	6000 mm	0,854
33 x 22 x 2 mm	8 mm	6000 mm	0,486
35 x 25 x 2 mm	2 mm	6000 mm	0,596
35 x 35 x 2,5 mm	2,5 mm	6000 mm	0,863
40 x 20 x 2 mm	2 mm	6000 mm	0,596
40 x 40 x 2 mm	2 mm	6000 mm	0,784
40 x 40 x 2 mm	4 mm	6000 mm	0,784
40 x 40 x 2,5 mm	2 mm	6000 mm	1,003
40 x 40 x 2,5 mm	2 mm	8000 mm	1,003
40 x 40 x 2,5 mm	4 mm	6000 mm	0,981
40 x 40 x 2,5 mm	5 mm	6000 mm	0,969
40 x 40 x 4 mm	2 mm	6000 mm	1,546
45 x 25 x 2 mm	2 mm	6000 mm	0,704
45 x 45 x 2,5 mm	3,5 mm	6000 mm	1,121
45 x 45 x 2,5 mm	3,5 mm	3000 mm	1,121
50 x 30 x 2 mm	5 mm	6000 mm	0,772
50 x 50 x 2 mm	4 mm	6000 mm	1,009
50 x 50 x 2,5 mm	4 mm	6000 mm	1,251
50 x 50 x 3 mm	2 mm	6000 mm	1,510
50 x 50 x 3 mm	4 mm	6000 mm	1,488
50 x 50 x 4 mm	4 mm	6000 mm	1,959
60 x 40 x 2,5 mm	2 mm	6000 mm	1,273
EN AW-6060 T66 (AlMgSi)			



A x B x S	Radius	Länge Length	kg/m
60 x 60 x 2,5 mm	3 mm	6000 mm	1,532
60 x 60 x 3 mm	3 mm	6000 mm	1,826
60 x 60 x 3 mm ¹	6 mm	6000 mm	1,784
60 x 60 x 4 mm ¹	3 mm	6000 mm	2,419
70 x 70 x 2,5 mm	4 mm	6000 mm	1,791
75 x 50 x 5 mm	2 mm	6000 mm	3,096
80 x 40 x 2,5 mm	3 mm	6000 mm	1,552
80 x 50 x 4 mm	3 mm	6000 mm	2,635
80 x 60 x 2,5 mm	3 mm	6000 mm	1,800
80x80x3mm ¹ (P088)	6 mm	6000 mm	2,432
80x80x4mm ¹ (P80)	6 mm	6000 mm	3,209
82,5 x 22,5 x 1,25 mm	2,75 mm	6000 mm	0,678
100x25x1,8/2,2 mm	3,5 mm	6000 mm	1,200
100 x 25 x 2 mm	2 mm	6000 mm	1,306
100x100x3mm ¹ (P088)	8 mm	6000 mm	3,052
100x100x4mm ¹ (P081)	10 mm	6000 mm	3,973
100 x 100 x 4 mm ^{1*}	10 mm	6000 mm	3,930
120x120x4mm ¹ (P120)	10 mm	6000 mm	4,863
180 x 180 x 10 mm	10 mm	6000 mm	18,200
200 x 200 x 4 mm	2 mm	6400 mm	8,467
200 x 200 x 4 mm ¹	2 mm	12050 mm	8,467
200 x 200 x 4 mm	10 mm	6000 mm	8,319
200 x 200 x 8 mm	5 mm	6000 mm	18,552
300 x 120 x 5 mm	2,5 mm	6000 mm	11,070
EN AW-6060 T66 (AlMgSi)			

¹ kann als Zaunsteher verwendet werden - can also be used as fence standing

* Ri 2,5 mm


Formrohre rechteckig mit Steg
Rectangular tubes with bar
EN AW-6060 T66 (AlMgSi)

A x B x S	Info	Länge Length	kg/m
90 x 18 x 1,5 mm	mit Steg • with bar	6000 mm	0,920
97 x 17 x 1,2 mm	mit Steg • with bar	6000 mm	0,800
120,3 x 25 x 1,45 mm	mit 2x Steg • with 2 bars	6000 mm	1,300
150 x 15 x 2 mm	mit 2x Steg • with 2 bars	6000 mm	1,858
150 x 18 x 2 mm	mit 2x Steg • with 2 bars	6000 mm	1,922
160 x 18 x 2 mm	mit Steg • with bar	6000 mm	1,955
200 x 18 x 2 mm	mit Steg • with bar	6000 mm	2,387
EN AW-6060 T66 (AlMgSi)			

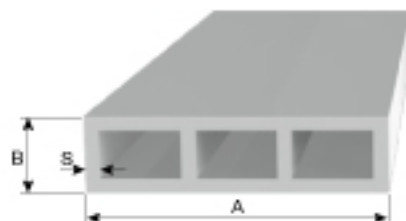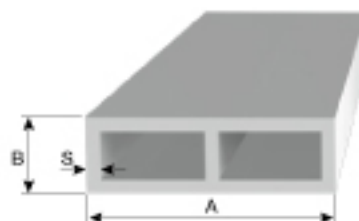

Flachstangen • Flat bars

EN AW-6060 T66 (AlMgSi)



A x B	Länge Length	kg/m
8 x 2 mm	6000 mm	0,043
8 x 5 mm	6000 mm	0,108
10 x 2 mm	6000 mm	0,054
10 x 3 mm	6000 mm	0,081
10 x 4 mm	6000 mm	0,108
10 x 5 mm	6000 mm	0,135
10 x 6 mm	6000 mm	0,162
10 x 8 mm	6000 mm	0,216
12 x 2 mm	6000 mm	0,065
12 x 3 mm	6000 mm	0,097
12 x 4 mm	6000 mm	0,130
12 x 5 mm	6000 mm	0,162
12 x 6 mm	6000 mm	0,194
12 x 8 mm	6000 mm	0,259
12 x 10 mm	6000 mm	0,324
15 x 2 mm	6000 mm	0,081
15 x 3 mm	6000 mm	0,122
15 x 4 mm	6100 mm	0,162
15 x 5 mm	6000 mm	0,203
15 x 6 mm	6000 mm	0,243
15 x 8 mm	6000 mm	0,324
15 x 10 mm	6000 mm	0,405
16 x 3 mm	6000 mm	0,130
16 x 5 mm	6000 mm	0,216
18 x 3 mm	6000 mm	0,148
18 x 5 mm	6000 mm	0,243
18 x 8 mm	6000 mm	0,389
20 x 2 mm	6000 mm	0,108
20 x 3 mm	6000 mm	0,162
20 x 4 mm	6000 mm	0,216
20 x 5 mm	6000 mm	0,270
20 x 6 mm	6000 mm	0,324
20 x 8 mm	6000 mm	0,432
20 x 10 mm	6000 mm	0,540
20 x 12 mm	6000 mm	0,648
20 x 15 mm	6000 mm	0,810
25 x 2 mm	6000 mm	0,135
25 x 3 mm	6000 mm	0,203
25 x 4 mm	6000 mm	0,270
25 x 5 mm	6000 mm	0,338
25 x 6 mm	6000 mm	0,405
25 x 8 mm	6000 mm	0,540
25 x 10 mm	6000 mm	0,675
25 x 12 mm	6000 mm	0,810
25 x 15 mm	6000 mm	1,013
25 x 20 mm	6000 mm	1,350
29 x 2 mm	6000 mm	0,157
30 x 2 mm	6000 mm	0,162
30 x 2,5 mm	6000 mm	0,203
30 x 3 mm	6000 mm	0,243

EN AW-6060 T66 (AlMgSi)

A x B	Länge Length	kg/m
30 x 4 mm	6000 mm	0,324
30 x 5 mm	6000 mm	0,405
30 x 6 mm	6000 mm	0,486
30 x 8 mm	6000 mm	0,648
30 x 10 mm	6000 mm	0,810
30 x 12 mm	6000 mm	0,972
30 x 15 mm	6000 mm	1,215
30 x 20 mm	6000 mm	1,620
30 x 25 mm	6000 mm	2,025
35 x 2 mm	6000 mm	0,189
35 x 3 mm	6000 mm	0,284
35 x 4 mm	6000 mm	0,378
35 x 5 mm	6000 mm	0,473
35 x 6 mm	6000 mm	0,567
35 x 8 mm	6000 mm	0,756
35 x 10 mm	6000 mm	0,945
35 x 12 mm	6000 mm	1,134
35 x 15 mm	6000 mm	1,418
35 x 20 mm	6000 mm	1,890
35 x 25 mm	6000 mm	2,363
40 x 2 mm	6000 mm	0,216
40 x 3 mm	6000 mm	0,324
40 x 4 mm	6000 mm	0,432
40 x 5 mm	6000 mm	0,540
40 x 6 mm	6000 mm	0,648
40 x 8 mm	6000 mm	0,864
40 x 10 mm	6000 mm	1,080
40 x 12 mm	6000 mm	1,296
40 x 15 mm	6000 mm	1,620
40 x 20 mm	6000 mm	2,160
40 x 25 mm	6000 mm	2,700
40 x 30 mm	6000 mm	3,240
45 x 2 mm	6000 mm	0,243
45 x 3 mm	6000 mm	0,365
45 x 5 mm	6000 mm	0,608
45 x 6 mm	6000 mm	0,729
45 x 8 mm	6000 mm	0,972
45 x 10 mm	6000 mm	1,215
45 x 15 mm	6000 mm	1,823
45 x 20 mm	6000 mm	2,430
45 x 30 mm	6000 mm	3,645
50 x 2 mm	6000 mm	0,270
50 x 3 mm	6000 mm	0,405
50 x 4 mm	6000 mm	0,540
50 x 5 mm	6000 mm	0,675
50 x 6 mm	6000 mm	0,810
50 x 8 mm	6000 mm	1,080
50 x 10 mm	6000 mm	1,350
50 x 12 mm	6000 mm	1,620
50 x 15 mm	6000 mm	2,025


EN AW-6060 T66 (AlMgSi)

A x B	Länge Length	kg/m
50 x 20 mm	6000 mm	2,700
50 x 25 mm	6000 mm	3,375
50 x 30 mm	6000 mm	4,050
50 x 35 mm	6000 mm	4,725
50 x 40 mm	6000 mm	5,400
55 x 5 mm	6000 mm	0,743
55 x 8 mm	6000 mm	1,188
55 x 10 mm	6000 mm	1,485
60 x 2 mm	6000 mm	0,324
60 x 3 mm	6000 mm	0,486
60 x 4 mm	6000 mm	0,648
60 x 5 mm	6000 mm	0,810
60 x 6 mm	6000 mm	0,972
60 x 8 mm	6000 mm	1,296
60 x 10 mm	6000 mm	1,620
60 x 12 mm	6000 mm	1,944
60 x 15 mm	6000 mm	2,430
60 x 20 mm	6000 mm	3,240
60 x 25 mm	6000 mm	4,050
60 x 30 mm	6000 mm	4,860
60 x 40 mm	6000 mm	6,480
60 x 50 mm	6000 mm	8,100
70 x 2 mm	6000 mm	0,378
70 x 3 mm	6000 mm	0,567
70 x 4 mm	6000 mm	0,756
70 x 5 mm	6000 mm	0,945
70 x 6 mm	6000 mm	1,134
70 x 8 mm	6000 mm	1,512
70 x 10 mm	6000 mm	1,890
70 x 12 mm	6000 mm	2,268
70 x 15 mm	6000 mm	2,835
70 x 20 mm	6000 mm	3,780
70 x 25 mm	6000 mm	4,725
70 x 30 mm	6000 mm	5,670
70 x 35 mm	6000 mm	6,615
70 x 40 mm	6000 mm	7,560
70 x 50 mm	6000 mm	9,450
75 x 5 mm	6000 mm	1,013
80 x 2 mm	6000 mm	0,432
80 x 3 mm	6000 mm	0,648
80 x 4 mm	6000 mm	0,864
80 x 5 mm	6000 mm	1,080
80 x 6 mm	6000 mm	1,296
80 x 8 mm	6000 mm	1,728
80 x 10 mm	6000 mm	2,160
80 x 12 mm	6000 mm	2,592
80 x 15 mm	6000 mm	3,240
80 x 20 mm	6000 mm	4,320
80 x 25 mm	6000 mm	5,400
80 x 30 mm	6000 mm	6,480

EN AW-6060 T66 (AlMgSi)

Flachstangen • Flat bars

EN AW-6060 T66 (AlMgSi)



A x B	Länge Length	kg/m
80 x 35 mm	6000 mm	7,560
80 x 40 mm	6000 mm	8,640
80 x 50 mm	6000 mm	10,800
80 x 60 mm	6000 mm	12,960
90 x 3 mm	6000 mm	0,729
90 x 5 mm	6000 mm	1,215
90 x 6 mm	6000 mm	1,458
90 x 8 mm	6000 mm	1,944
90 x 10 mm	6000 mm	2,430
90 x 15 mm	6000 mm	3,645
90 x 20 mm	6000 mm	4,860
90 x 25 mm	6000 mm	6,075
90 x 30 mm	6000 mm	7,290
90 x 40 mm	6000 mm	9,720
100 x 2 mm	6000 mm	0,540
100 x 3 mm	6000 mm	0,810
100 x 4 mm	6000 mm	1,080
100 x 5 mm	6000 mm	1,350
100 x 6 mm	6000 mm	1,620
100 x 8 mm	6000 mm	2,160
100 x 10 mm	6000 mm	2,700
100 x 12 mm	6000 mm	3,240
100 x 15 mm	6000 mm	4,050
100 x 20 mm	6000 mm	5,400
100 x 25 mm	6000 mm	6,750
100 x 30 mm	6000 mm	8,100
100 x 40 mm	6000 mm	10,800
EN AW-6060 T66 (AlMgSi)		

A x B	Länge Length	kg/m
100 x 50 mm	6000 mm	13,500
100 x 60 mm	6000 mm	16,200
110 x 8 mm	6000 mm	2,376
110 x 10 mm	6000 mm	2,970
120 x 5 mm	6000 mm	1,620
120 x 6 mm	6000 mm	1,944
120 x 8 mm	6000 mm	2,592
120 x 10 mm	6000 mm	3,240
120 x 12 mm	6000 mm	3,888
120 x 15 mm	6000 mm	4,860
120 x 20 mm	6000 mm	6,480
120 x 25 mm	6000 mm	8,100
120 x 30 mm	6000 mm	9,720
120 x 40 mm	6000 mm	12,960
125 x 8 mm	6000 mm	2,700
125 x 10 mm	6000 mm	3,375
130 x 8 mm	6000 mm	2,808
130 x 10 mm	6000 mm	3,510
130 x 15 mm	6000 mm	5,265
140 x 10 mm	6000 mm	3,780
140 x 15 mm	6000 mm	5,670
140 x 20 mm	6000 mm	7,560
150 x 5 mm	6000 mm	2,025
150 x 6 mm	6000 mm	2,430
150 x 8 mm	6000 mm	3,240
150 x 10 mm	6000 mm	4,050
150 x 12 mm	6000 mm	4,860
EN AW-6060 T66 (AlMgSi)		

A x B	Länge Length	kg/m
150 x 15 mm	6000 mm	6,075
150 x 20 mm	6000 mm	8,100
150 x 30 mm	6000 mm	12,150
150 x 40 mm	6000 mm	16,200
160 x 5 mm	6000 mm	2,160
160 x 6 mm	6000 mm	2,592
160 x 8 mm	6000 mm	3,456
160 x 10 mm	6000 mm	4,320
160 x 15 mm	6000 mm	6,480
160 x 20 mm	6000 mm	8,640
180 x 8 mm	6000 mm	3,888
180 x 10 mm	6000 mm	4,860
200 x 5 mm	6000 mm	2,700
200 x 8 mm	6000 mm	4,320
200 x 10 mm	6000 mm	5,400
200 x 15 mm	6000 mm	8,100
200 x 20 mm	6000 mm	10,800
200 x 25 mm	6000 mm	13,500
200 x 30 mm	6000 mm	16,200
250 x 8 mm	6000 mm	5,400
250 x 10 mm	6000 mm	6,750
250 x 15 mm	6000 mm	10,125
250 x 20 mm	6000 mm	13,500
300 x 5 mm	6000 mm	4,050
300 x 10 mm	6000 mm	8,100
300 x 20 mm	6000 mm	16,200
EN AW-6060 T66 (AlMgSi)		


Flachstangen • Flat bars

EN AW-2007 T4 (AlCu4PbMgMn)

A x B	Länge Length	kg/m
20 x 10 mm	3000 mm	0,570
20 x 15 mm	3000 mm	0,855
25 x 10 mm	3000 mm	0,713
30 x 8 mm	3000 mm	0,684
30 x 10 mm	3000 mm	0,855
30 x 15 mm	3000 mm	1,283
30 x 20 mm	3000 mm	1,711
40 x 10 mm	3000 mm	1,140
40 x 15 mm	3000 mm	1,711
40 x 20 mm	3000 mm	2,280
40 x 25 mm	3000 mm	2,850
40 x 30 mm	3000 mm	3,420
50 x 10 mm	3000 mm	1,426
50 x 15 mm	3000 mm	2,025
EN AW-2007 T4 (AlCu4PbMgMn)		

A x B	Länge Length	kg/m
50 x 20 mm	3000 mm	2,851
50 x 25 mm	3000 mm	3,564
50 x 30 mm	3000 mm	4,277
50 x 40 mm	3000 mm	5,700
60 x 15 mm	3000 mm	2,566
60 x 20 mm	3000 mm	3,420
60 x 25 mm	3000 mm	4,275
60 x 30 mm	3000 mm	5,132
60 x 40 mm	3000 mm	6,843
70 x 20 mm	3000 mm	3,990
70 x 30 mm	3000 mm	5,985
70 x 50 mm	3000 mm	9,979
80 x 15 mm	3000 mm	3,420
80 x 20 mm	3000 mm	4,563
EN AW-2007 T4 (AlCu4PbMgMn)		

A x B	Länge Length	kg/m
80 x 25 mm	3000 mm	5,702
80 x 30 mm	3000 mm	6,800
80 x 40 mm	3000 mm	9,120
80 x 50 mm	3000 mm	11,405
90 x 30 mm	3000 mm	7,695
100 x 12 mm	3000 mm	3,240
100 x 20 mm	3000 mm	5,702
100 x 25 mm	3000 mm	7,125
100 x 40 mm	3000 mm	11,405
100 x 50 mm	3000 mm	14,256
120 x 50 mm	3000 mm	17,107
150 x 20 mm	3000 mm	8,554
EN AW-2007 T4 (AlCu4PbMgMn)		



EN AW-6082 T6 (AlSi1MgMn)

A x B	Länge Length	kg/m
30 x 10 mm	6000 mm	0,810
40 x 15 mm	6000 mm	1,620
50 x 5 mm	6000 mm	0,675
50 x 20 mm	6000 mm	2,710
50 x 30 mm	6000 mm	4,065
60 x 10 mm	6000 mm	1,620
70 x 20 mm	6000 mm	3,780
80 x 8 mm	6000 mm	1,728
100 x 8 mm	6000 mm	2,160
100 x 10 mm	6000 mm	2,700
EN AW-6082 T6 (AlSi1MgMn)		

Flachstangen eloxiert A6/C0 12 µ


Flat bars anodized A6/C0 12 µ

EN AW-6060 T66 (AlMgSi)

A x B	Länge Length	kg/m
10 x 3 mm	6000 mm	0,081
EN AW-6060 T66 (AlMgSi)		

Winkel • Angles

EN AW-6060 T66 (AlMgSi)




A x B x S	Länge Length	kg/m
10 x 5 x 2 mm	6000 mm	0,070
10 x 10 x 1 mm	6000 mm	0,051
10 x 10 x 1,5 mm	6000 mm	0,075
10 x 10 x 2 mm	6000 mm	0,097
12 x 12 x 1 mm	6000 mm	0,062
12 x 12 x 2 mm	6000 mm	0,119
15 x 10 x 2 mm	6000 mm	0,124
15 x 15 x 1 mm	6000 mm	0,078
15 x 15 x 1,5 mm	6000 mm	0,115
15 x 15 x 2 mm	6000 mm	0,151
15 x 15 x 3 mm	6000 mm	0,219
16 x 8 x 2 mm	6000 mm	0,119
20 x 10 x 1,5 mm	6000 mm	0,115
20 x 10 x 2 mm	6000 mm	0,151
20 x 15 x 2 mm	6000 mm	0,178
20 x 15 x 3 mm	6000 mm	0,259
20 x 20 x 1,5 mm	6000 mm	0,156
20 x 20 x 2 mm	6000 mm	0,205
20 x 20 x 2,5 mm	6000 mm	0,253
20 x 20 x 3 mm	6000 mm	0,300
20 x 20 x 4 mm	6000 mm	0,389
25 x 10 x 2 mm	6000 mm	0,178
25 x 15 x 1,5 mm	6000 mm	0,156
25 x 15 x 2 mm	6000 mm	0,205
25 x 15 x 3 mm	6000 mm	0,300
25 x 20 x 1,5 mm	6000 mm	0,176
25 x 20 x 2 mm	6000 mm	0,232
25 x 20 x 2,5 mm	6000 mm	0,287
25 x 20 x 3 mm	6000 mm	0,340
25 x 25 x 1 mm	6000 mm	0,132
25 x 25 x 1,5 mm	6000 mm	0,196
25 x 25 x 2 mm	6000 mm	0,259
25 x 25 x 2,5 mm	6000 mm	0,321
25 x 25 x 3 mm	6000 mm	0,381
25 x 25 x 4 mm	6000 mm	0,497
25 x 25 x 5 mm	6000 mm	0,608
30 x 10 x 2 mm	6000 mm	0,205
30 x 15 x 1,5 mm	6000 mm	0,176
30 x 15 x 2 mm	6000 mm	0,232
30 x 15 x 3 mm	6000 mm	0,340
30 x 20 x 1 mm	6000 mm	0,132
30 x 20 x 1,5 mm	6000 mm	0,196
30 x 20 x 2 mm	6000 mm	0,259
30 x 20 x 2,5 mm	6000 mm	0,321
EN AW-6060 T66 (AlMgSi)		

A x B x S	Länge Length	kg/m
30 x 20 x 3 mm	6000 mm	0,381
30 x 20 x 4 mm	6000 mm	0,497
30 x 25 x 2 mm	6000 mm	0,286
30 x 25 x 3 mm	6000 mm	0,421
30 x 30 x 1 mm	6000 mm	0,159
30 x 30 x 2 mm	6000 mm	0,313
30 x 30 x 2,5 mm	6000 mm	0,388
30 x 30 x 3 mm	6000 mm	0,462
30 x 30 x 4 mm	6000 mm	0,605
30 x 30 x 5 mm	6000 mm	0,743
35 x 10 x 2 mm	6000 mm	0,232
35 x 15 x 2 mm	6000 mm	0,259
35 x 20 x 2 mm	6000 mm	0,286
35 x 20 x 3 mm	6000 mm	0,421
35 x 25 x 2 mm	6000 mm	0,327
35 x 25 x 3 mm	6000 mm	0,462
35 x 35 x 2 mm	6000 mm	0,367
35 x 35 x 3 mm	6000 mm	0,543
35 x 35 x 4 mm	6000 mm	0,713
35 x 35 x 5 mm	6000 mm	0,878
40 x 10 x 2 mm	6000 mm	0,259
40 x 15 x 2 mm	6000 mm	0,286
40 x 20 x 1,5 mm	6000 mm	0,237
40 x 20 x 2 mm	6000 mm	0,313
40 x 20 x 2,5 mm	6000 mm	0,388
40 x 20 x 3 mm	6000 mm	0,462
40 x 20 x 4 mm	6000 mm	0,605
40 x 20 x 5 mm	6000 mm	0,743
40 x 25 x 2 mm	6000 mm	0,340
40 x 25 x 3 mm	6000 mm	0,502
40 x 25 x 4 mm	6000 mm	0,659
40 x 30 x 2 mm	6000 mm	0,367
40 x 30 x 3 mm	6000 mm	0,543
40 x 30 x 4 mm	6000 mm	0,713
40 x 30 x 5 mm	6000 mm	0,878
40 x 35 x 2 mm	6000 mm	0,394
40 x 40 x 2 mm	6000 mm	0,421
40 x 40 x 3 mm	6000 mm	0,624
40 x 40 x 4 mm	6000 mm	0,821
40 x 40 x 5 mm	6000 mm	1,013
40 x 40 x 6 mm	6000 mm	1,199
45 x 15 x 2 mm	6000 mm	0,313
45 x 20 x 2 mm	6000 mm	0,340
45 x 25 x 3 mm	6000 mm	0,543
EN AW-6060 T66 (AlMgSi)		

A x B x S	Länge Length	kg/m
45 x 30 x 3 mm	6000 mm	0,583
45 x 45 x 2 mm	6000 mm	0,475
45 x 45 x 3 mm	6000 mm	0,705
45 x 45 x 4 mm	6000 mm	0,929
45 x 45 x 5 mm	6000 mm	1,148
50 x 10 x 2 mm	6000 mm	0,313
50 x 15 x 2 mm	6000 mm	0,340
50 x 15 x 2,5 mm	6000 mm	0,422
50 x 20 x 2 mm	6000 mm	0,367
50 x 20 x 2,5 mm	6000 mm	0,456
50 x 20 x 3 mm	6000 mm	0,543
50 x 20 x 4 mm	6000 mm	0,713
50 x 25 x 2 mm	6000 mm	0,394
50 x 25 x 3 mm	6000 mm	0,583
50 x 25 x 4 mm	6000 mm	0,767
50 x 25 x 5 mm	6000 mm	0,945
50 x 30 x 2 mm	6000 mm	0,421
50 x 30 x 3 mm	6000 mm	0,624
50 x 30 x 4 mm	6000 mm	0,821
50 x 30 x 5 mm	6000 mm	1,013
50 x 35 x 4 mm	6000 mm	0,875
50 x 40 x 2 mm	6000 mm	0,475
50 x 40 x 3 mm	6000 mm	0,705
50 x 40 x 4 mm	6000 mm	0,929
50 x 40 x 5 mm	6000 mm	1,148
50 x 50 x 2 mm	6000 mm	0,529
50 x 50 x 3 mm	6000 mm	0,786
50 x 50 x 4 mm	6000 mm	1,037
50 x 50 x 5 mm	6000 mm	1,283
50 x 50 x 6 mm	6000 mm	1,523
50 x 50 x 8 mm	6000 mm	1,987
50 x 50 x 10 mm	6000 mm	2,430
60 x 10 x 2 mm	6000 mm	0,367
60 x 15 x 2 mm	6000 mm	0,394
60 x 20 x 2 mm	6000 mm	0,421
60 x 20 x 2,5 mm	6000 mm	0,523
60 x 20 x 3 mm	6000 mm	0,624
60 x 25 x 2 mm	6000 mm	0,448
60 x 25 x 2,5 mm	6000 mm	0,557
60 x 25 x 3 mm	6000 mm	0,664
60 x 30 x 2 mm	6000 mm	0,475
60 x 30 x 3 mm	6000 mm	0,705
60 x 30 x 4 mm	6000 mm	0,929
60 x 30 x 5 mm	6000 mm	1,148
EN AW-6060 T66 (AlMgSi)		

Winkel • Angles


EN AW-6060 T66 (AlMgSi)



A x B x S	Länge Length	kg/m
60 x 30 x 6 mm	6000 mm	1,361
60 x 40 x 1,8 mm	6000 mm	0,477
60 x 40 x 2 mm	6000 mm	0,529
60 x 40 x 3 mm	6000 mm	0,786
60 x 40 x 4 mm	6000 mm	1,037
60 x 40 x 5 mm	6000 mm	1,283
60 x 40 x 6 mm	6000 mm	1,523
60 x 50 x 2 mm	6000 mm	0,583
60 x 60 x 2 mm	6000 mm	0,637
60 x 60 x 2,5 mm	6000 mm	0,793
60 x 60 x 3 mm	6000 mm	0,948
60 x 60 x 4 mm	6000 mm	1,253
60 x 60 x 5 mm	6000 mm	1,553
60 x 60 x 6 mm	6000 mm	1,847
60 x 60 x 8 mm	6000 mm	2,419
60 x 60 x 10 mm	6000 mm	2,970
70 x 15 x 2 mm	6000 mm	0,448
70 x 20 x 2 mm	6000 mm	0,475
70 x 25 x 2 mm	6000 mm	0,502
70 x 25 x 2,5 mm	6000 mm	0,624
70 x 30 x 2 mm	6000 mm	0,529
70 x 30 x 3 mm	6000 mm	0,786
70 x 40 x 2 mm	6000 mm	0,583
70 x 40 x 4 mm	6000 mm	1,145
70 x 50 x 3 mm	6000 mm	0,948
70 x 50 x 5 mm	6000 mm	1,553
70 x 50 x 5,5 mm	6000 mm	1,700
70 x 70 x 2,5 mm	6000 mm	0,928
70 x 70 x 5 mm	6000 mm	1,823
70 x 70 x 6 mm	6000 mm	2,171
70 x 70 x 7 mm	6000 mm	2,514
75 x 50 x 5 mm	6000 mm	1,620
75 x 75 x 4 mm	6000 mm	1,577
75 x 75 x 5 mm	6000 mm	1,958
80 x 15 x 2 mm	6000 mm	0,502
80 x 20 x 2 mm	6000 mm	0,529
80 x 25 x 2 mm	6000 mm	0,556
80 x 25 x 2,5 mm	6000 mm	0,692
80 x 30 x 2 mm	6000 mm	0,583
80 x 30 x 3 mm	6000 mm	0,867
80 x 40 x 2 mm	6000 mm	0,637
80 x 40 x 3 mm	6000 mm	0,948
80 x 40 x 4 mm	6000 mm	1,253
80 x 40 x 5 mm	6000 mm	1,553
EN AW-6060 T66 (AlMgSi)		

A x B x S	Länge Length	kg/m
80 x 40 x 6 mm	6000 mm	1,847
80 x 40 x 8 mm	6000 mm	2,419
80 x 50 x 3 mm	6000 mm	1,029
80 x 50 x 4 mm	6000 mm	1,361
80 x 50 x 5 mm	6000 mm	1,688
80 x 50 x 6 mm	6000 mm	2,009
80 x 60 x 4 mm	6000 mm	1,469
80 x 60 x 6 mm	6000 mm	2,171
80 x 80 x 3 mm	6000 mm	1,272
80 x 80 x 4 mm	6000 mm	1,685
80 x 80 x 5 mm	6000 mm	2,093
80 x 80 x 6 mm	6000 mm	2,495
80 x 80 x 8 mm	6000 mm	3,283
80 x 80 x 10 mm	6000 mm	4,050
90 x 20 x 2 mm	6000 mm	0,313
90 x 40 x 4 mm	6000 mm	1,361
90 x 60 x 6 mm	6000 mm	2,333
90 x 90 x 6 mm	6000 mm	2,819
100 x 20 x 2 mm	6000 mm	0,637
100 x 25 x 2 mm	6000 mm	0,664
100 x 30 x 2 mm	6000 mm	0,691
100 x 30 x 3 mm	6000 mm	1,029
100 x 40 x 2 mm	6000 mm	0,745
100 x 40 x 3 mm	6000 mm	1,110
100 x 40 x 4 mm	6000 mm	1,469
100 x 40 x 6 mm	6000 mm	2,170
100 x 50 x 2 mm	6000 mm	0,799
100 x 50 x 3 mm	6000 mm	1,191
100 x 50 x 5 mm	6000 mm	1,958
100 x 50 x 6 mm	6000 mm	2,333
100 x 50 x 8 mm	6000 mm	3,067
100 x 50 x 10 mm	6000 mm	3,780
100 x 60 x 6 mm	6000 mm	2,495
100 x 60 x 8 mm	6000 mm	3,283
100 x 80 x 6 mm	6000 mm	2,819
100 x 80 x 8 mm	6000 mm	3,715
100 x 100 x 3 mm	6000 mm	1,596
100 x 100 x 4 mm	6000 mm	2,117
100 x 100 x 5 mm	6000 mm	2,633
100 x 100 x 6 mm	6000 mm	3,143
100 x 100 x 8 mm	6000 mm	4,147
100 x 100 x 10 mm	6000 mm	5,130
110 x 30 x 2 mm	6000 mm	0,745
120 x 20 x 2 mm	6000 mm	0,745
EN AW-6060 T66 (AlMgSi)		

A x B x S	Länge Length	kg/m
120 x 30 x 3 mm	6000 mm	1,191
120 x 40 x 3 mm	6000 mm	1,272
120 x 40 x 4 mm	6000 mm	1,685
120 x 50 x 5 mm	6000 mm	2,228
120 x 60 x 2 mm	6000 mm	0,961
120 x 60 x 6 mm	6000 mm	2,819
120 x 60 x 8 mm	6000 mm	3,715
120 x 80 x 3 mm	6000 mm	1,596
120 x 80 x 8 mm	6000 mm	4,147
120 x 80 x 10 mm	6000 mm	5,130
120 x 80 x 15 mm	6000 mm	7,493
120 x 100 x 4 mm	3800 mm	2,333
120 x 100 x 4 mm	6000 mm	2,333
120 x 120 x 2,5 mm	6000 mm	1,603
120 x 120 x 8 mm	6000 mm	5,011
120 x 120 x 10 mm	6000 mm	6,210
120 x 120 x 12 mm	6000 mm	7,387
130 x 30 x 3 mm	6000 mm	1,272
130 x 80 x 6 mm	6000 mm	3,305
140 x 40 x 3 mm	6000 mm	1,434
140 x 40 x 4 mm	6000 mm	1,901
140 x 40 x 6 mm	6000 mm	2,819
140 x 140 x 8 mm	6000 mm	5,875
150 x 50 x 4 mm	6000 mm	2,117
150 x 50 x 5 mm	6000 mm	2,633
150 x 70 x 4 mm	6000 mm	2,341
150 x 75 x 8 mm	6000 mm	4,687
150 x 75 x 10 mm	6000 mm	5,805
150 x 80 x 6 mm	6000 mm	3,629
150 x 100 x 5 mm	6000 mm	3,308
150 x 100 x 10 mm	6000 mm	6,480
160 x 40 x 4 mm	6000 mm	2,117
160 x 60 x 8 mm	6000 mm	4,579
180 x 50 x 3 mm	6000 mm	1,840
180 x 80 x 6 mm	6000 mm	4,115
180 x 80 x 10 mm	6000 mm	6,750
180 x 150 x 6 mm	6000 mm	5,249
200 x 50 x 3 mm	6000 mm	2,000
200 x 100 x 10 mm	6000 mm	7,830
220 x 50 x 3 mm	6000 mm	2,160
300 x 60 x 6 mm	6000 mm	5,735
EN AW-6060 T66 (AlMgSi)		



Winkel • Angles

EN AW-2024 T3 (AlCu4Mg1)

A x B x S	Länge Length	kg/m
30 x 30 x 3 mm	7050 mm	0,474
EN AW-2024 T3 (AlCu4Mg1)		

Winkel eloxiert A6/C0 15 µ

Angles anodized A6/C0 15 µ

EN AW-6060 T66 (AlMgSi)

A x B x S	Länge Length	kg/m
20 x 20 x 2 mm	6150 mm	0,205
25 x 25 x 2 mm	6150 mm	0,259
30 x 20 x 2 mm	6150 mm	0,259
30 x 30 x 2 mm	6150 mm	0,313
40 x 20 x 2 mm	6150 mm	0,313
40 x 40 x 2 mm	6150 mm	0,421
EN AW-6060 T66 (AlMgSi)		

Winkel eloxiert „Edelstahloptik“

Angles anodized „stainless steel optic“

EN AW-6060 T66 (AlMgSi)

A x B x S	Länge Length	kg/m
20 x 20 x 2 mm	6150 mm	0,205
30 x 30 x 2 mm	6150 mm	0,313
EN AW-6060 T66 (AlMgSi)		

Winkel beschichtet RAL 9010


Angles powder coated RAL 9010

EN AW-6060 T66 (AlMgSi)

A x B x S	Länge Length	kg/m
20 x 20 x 2 mm	6150 mm	0,205
30 x 30 x 2 mm	6150 mm	0,313
EN AW-6060 T66 (AlMgSi)		

T-Profile • T-Sections

EN AW-6060 T66 (AlMgSi)



A x B x S	Länge Length	kg/m
15 x 15 x 2 mm	6000 mm	0,150
15 x 30 x 2 mm	6000 mm	0,232
20 x 20 x 2 mm	6000 mm	0,205
20 x 20 x 3 mm	6000 mm	0,300
20 x 40 x 2 mm	6000 mm	0,313
25 x 25 x 2 mm	6000 mm	0,259
25 x 25 x 3 mm	6000 mm	0,381
30 x 20 x 2 mm	6000 mm	0,259
30 x 30 x 2 mm	6000 mm	0,313
30 x 30 x 3 mm	6000 mm	0,462
30 x 60 x 4 mm	6000 mm	0,929
35 x 35 x 3 mm	6000 mm	0,543
35 x 35 x 4 mm	6000 mm	0,713
40 x 40 x 2 mm	6000 mm	0,421
40 x 40 x 3 mm	6000 mm	0,624
40 x 40 x 4 mm	6000 mm	0,821
45 x 80 x 2 mm	6000 mm	0,664
45 x 110 x 2 mm	6000 mm	0,826
50 x 50 x 3 mm	6000 mm	0,786
50 x 50 x 4 mm	6000 mm	1,037


EN AW-6060 T66 (AlMgSi)

A x B x S	Länge Length	kg/m
50 x 50 x 5 mm	6000 mm	1,283
50 x 70 x 5 mm	6000 mm	1,553
50 x 80 x 5 mm	6000 mm	1,688
50 x 120 x 2 mm	6000 mm	0,910
50 x 140 x 2 mm	6000 mm	1,020
60 x 60 x 4 mm	6000 mm	1,250
60 x 60 x 6 mm	6000 mm	1,847
60 x 100 x 5 mm	6000 mm	2,093
60 x 120 x 1,6 mm	6000 mm	0,771
60 x 120 x 2 mm	6000 mm	0,961
70 x 70 x 8 mm	6000 mm	2,851
70 x 120 x 2 mm	6000 mm	1,020
80 x 50 x 5 mm	6000 mm	1,688
80 x 80 x 5 mm	6000 mm	2,093
80 x 80 x 7 mm	6000 mm	2,892
80 x 80 x 8 mm	6000 mm	3,280
100 x 60 x 5 mm	6000 mm	2,093
100 x 100 x 3,5 mm	6000 mm	1,857
100 x 100 x 6 mm	6000 mm	3,143
100 x 100 x 10 mm	6000 mm	5,130

EN AW-6060 T66 (AlMgSi)


T-Profile mit Radius • T-Sections with radius

EN AW-6082 T66 (AlSi1MgMn)



A x B x S	Radius	Länge Length	kg/m
152,4 x 152,4 x 12,7 mm	12 mm	6000 mm	10,18

EN AW-6082 T66 (AlSi1MgMn)



H-Profile, Doppel-T-Profil (I-Träger-Profil) H-Sections, Double-T-Sections (I-Beams) EN AW-6060 T66 (AlMgSi)

A x B x S1 x S2	Länge Length	kg/m
25 x 25 x 2 x 2 mm	6000 mm	0,383
82 x 30 x 1,5 x 1,5 mm *	6000 mm	0,269
12 x 40 x 4 x 2 mm	6000 mm	0,520
42,5 x 65 x 2,5 x 2,5 mm	6000 mm	1,131
100 x 50 x 5 x 7 mm	6000 mm	3,051
120 x 120 x 8 x 8 mm	6000 mm	7,430
EN AW-6060 T66 (AlMgSi)		

* R 1,5 mm

EN AW-6005 T6 (AlSiMg)


A x B x S1 x S2	Länge Length	kg/m
122 x 158 x 5 x 6 mm	6000 mm	6,604
140 x 90 x 8 x 10 mm	6000 mm	7,452
EN AW-6005 T6 (AlSiMg)		

EN AW-6082 (AlSi1MgMn)

A x B x S1 x S2	Länge Length	kg/m
100 x 100 x 10 x 10 mm	6000 mm	7,560
140 x 90 x 8 x 10 mm	10000 mm	7,452
160 x 120 x 6 x 8 mm	6000 mm	7,517
160 x 120 x 6 x 8 mm	10000 mm	7,517
EN AW-6082 (AlSi1MgMn)		

U-Profile • U-Profiles

EN AW-6060 T66 (AlMgSi)



A x B x A x S	Länge Length	kg/m
6 x 6 x 6 x 1 mm	6000 mm	0,043
8 x 8 x 8 x 1 mm	6000 mm	0,059
9 x 9 x 9 x 1,5 mm	6000 mm	0,097
10 x 10 x 10 x 1 mm	6000 mm	0,080
10 x 10 x 10 x 1,5 mm	6000 mm	0,109
10 x 10 x 10 x 2 mm	6000 mm	0,140
15 x 10 x 15 x 1,5 mm	6000 mm	0,150
20 x 10 x 20 x 2 mm	6000 mm	0,248
30 x 10 x 30 x 2 mm	6000 mm	0,356
15 x 11 x 15 x 2 mm	6000 mm	0,200
12 x 12 x 12 x 2 mm	6000 mm	0,173
20 x 12 x 20 x 2 mm	6000 mm	0,259
13 x 13 x 13 x 2 mm	6000 mm	0,189
20 x 13 x 20 x 1,25 mm	6000 mm	0,170
7 x 13,2 x 7 x 1,2 / 2 mm	6500 mm	0,105
14 x 14 x 14 x 2 mm	6000 mm	0,205
15 x 15 x 15 x 1,5 mm	6000 mm	0,170
15 x 15 x 15 x 2 mm	6000 mm	0,221
15 x 15 x 15 x 3 mm	6000 mm	0,316
20 x 15 x 20 x 1,5 mm	6000 mm	0,211
20 x 15 x 20 x 2 mm	6000 mm	0,275
30 x 15 x 30 x 3 mm	6000 mm	0,559
18 x 18 x 18 x 2 mm	6000 mm	0,270
19 x 19 x 19 x 3 mm	6000 mm	0,413
20 x 19 x 20 x 1,25 mm	6000 mm	0,200
10 x 20 x 10 x 1,5 mm	6000 mm	0,150
10 x 20 x 10 x 2 mm	6000 mm	0,194
15 x 20 x 15 x 2 mm	6000 mm	0,280
20 x 20 x 20 x 1,5 mm	6000 mm	0,231
20 x 20 x 20 x 2 mm	6000 mm	0,302
20 x 20 x 20 x 3 mm	6000 mm	0,437
25 x 20 x 25 x 1,5 mm	6000 mm	0,270
25 x 20 x 25 x 2 mm	6000 mm	0,356
28 x 20 x 28 x 1,5 mm	6000 mm	0,300
30 x 20 x 30 x 1,5 mm	6000 mm	0,310
30 x 20 x 30 x 2 mm	6000 mm	0,410
40 x 20 x 40 x 2 mm	6000 mm	0,518
40 x 20 x 40 x 2,5 mm	6000 mm	0,641
40 x 20 x 40 x 4 mm	6000 mm	0,994
20 x 22 x 20 x 2 mm	6000 mm	0,313
23 x 23 x 23 x 1,5 mm	6000 mm	0,267
15 x 25 x 15 x 2 mm	6000 mm	0,275
19 x 25 x 19 x 3 mm	6000 mm	0,462
20 x 25 x 20 x 2 mm	6000 mm	0,329
20 x 25 x 20 x 2,5 mm	6000 mm	0,405
20 x 25 x 20 x 3 mm	6000 mm	0,478


EN AW-6060 T66 (AlMgSi)

A x B x A x S	Länge Length	kg/m
25 x 25 x 25 x 1,5 mm	6000 mm	0,290
25 x 25 x 25 x 2 mm	6000 mm	0,383
25 x 25 x 25 x 3 mm	6000 mm	0,559
30 x 25 x 30 x 2 mm	6000 mm	0,437
32 x 25 x 32 x 2 mm	6000 mm	0,459
40 x 25 x 40 x 2 mm	6000 mm	0,545
40 x 25 x 40 x 3 mm	6000 mm	0,802
50 x 25 x 50 x 2 mm	6000 mm	0,860
10 x 30 x 10 x 2 mm	6000 mm	0,250
15 x 30 x 15 x 2 mm	6000 mm	0,302
15 x 30 x 15 x 3 mm	6000 mm	0,437
20 x 30 x 20 x 2 mm	6000 mm	0,356
20 x 30 x 20 x 3 mm	6000 mm	0,518
30 x 30 x 30 x 2 mm	6000 mm	0,464
30 x 30 x 30 x 3 mm	6000 mm	0,680
40 x 30 x 40 x 2 mm	6000 mm	0,580
40 x 30 x 40 x 3 mm	6000 mm	0,842
50 x 30 x 50 x 3 mm	6000 mm	1,010
15 x 35 x 15 x 2 mm	6000 mm	0,329
20 x 35 x 20 x 2 mm	6000 mm	0,383
25 x 35 x 25 x 2 mm	6000 mm	0,437
35 x 35 x 35 x 2 mm	6000 mm	0,545
35 x 35 x 35 x 3 mm	6000 mm	0,802
15 x 40 x 15 x 2 mm	6000 mm	0,356
15 x 40 x 15 x 4 mm	6000 mm	0,670
20 x 40 x 20 x 2 mm	2340 mm	0,410
20 x 40 x 20 x 2 mm	6000 mm	0,410
20 x 40 x 20 x 2,5 mm	6000 mm	0,506
20 x 40 x 20 x 3 mm	6000 mm	0,599
20 x 40 x 20 x 4 mm	6000 mm	0,778
25 x 40 x 25 x 2 mm	6000 mm	0,464
25 x 40 x 25 x 3 mm	6000 mm	0,680
25 x 40 x 25 x 4 mm	6000 mm	0,886
30 x 40 x 30 x 2 mm	6000 mm	0,518
30 x 40 x 30 x 3 mm	6000 mm	0,761
30 x 40 x 30 x 4 mm	6000 mm	0,994
40 x 40 x 40 x 2 mm	6000 mm	0,626
40 x 40 x 40 x 2,5 mm	6000 mm	0,776
40 x 40 x 40 x 3 mm	6000 mm	0,923
40 x 40 x 40 x 4 mm	6000 mm	1,210
40 x 40 x 40 x 5 mm	6000 mm	1,485
60 x 40 x 60 x 3 mm	6000 mm	1,247
60 x 40 x 60 x 4 mm	6000 mm	1,642
20 x 45 x 20 x 2 mm	6000 mm	0,437
25 x 45 x 25 x 2 mm	6000 mm	0,491
25 x 45 x 25 x 3 mm	6000 mm	0,720

EN AW-6060 T66 (AlMgSi)

U-Profile • U-Profiles

EN AW-6060 T66 (AlMgSi)




A x B x A x S	Länge Length	kg/m
32 x 45 x 32 x 2 mm	6000 mm	0,567
45 x 45 x 45 x 2,5 mm	6000 mm	0,880
15 x 50 x 15 x 2 mm	6000 mm	0,410
20 x 50 x 20 x 2 mm	6000 mm	0,464
25 x 50 x 25 x 2 mm	6000 mm	0,518
25 x 50 x 25 x 2,5 mm	6000 mm	0,641
25 x 50 x 25 x 3 mm	6000 mm	0,761
25 x 50 x 25 x 4 mm	6000 mm	0,994
30 x 50 x 30 x 2 mm	6000 mm	0,572
30 x 50 x 30 x 3 mm	6000 mm	0,842
30 x 50 x 30 x 4 mm	6000 mm	1,102
40 x 50 x 40 x 3 mm	6000 mm	1,010
40 x 50 x 40 x 4 mm	6000 mm	1,318
50 x 50 x 50 x 2 mm	6000 mm	0,788
50 x 50 x 50 x 3 mm	6000 mm	1,166
50 x 50 x 50 x 4 mm	6000 mm	1,534
50 x 50 x 50 x 5 mm	6000 mm	1,890
90 x 50 x 90 x 3 mm	6000 mm	1,810
20 x 55 x 20 x 2 mm	6000 mm	0,491
45 x 55 x 45 x 2 mm	6000 mm	0,761
50 x 55 x 50 x 2 mm	6000 mm	0,815
20 x 60 x 20 x 2 mm	6000 mm	0,518
25 x 60 x 25 x 2,5 mm	6000 mm	0,750
25 x 60 x 25 x 3 mm	6000 mm	0,842
30 x 60 x 30 x 2 mm	6000 mm	0,626
30 x 60 x 30 x 3 mm	6000 mm	0,923
30 x 60 x 30 x 4 mm	6000 mm	1,210
40 x 60 x 40 x 2,5 mm	6000 mm	0,911
40 x 60 x 40 x 3 mm	6000 mm	1,085
40 x 60 x 40 x 4 mm	6000 mm	1,426
40 x 60 x 40 x 5 mm	6000 mm	1,755
50 x 60 x 50 x 2 mm	6000 mm	0,840
50 x 60 x 50 x 3 mm	6000 mm	1,247
60 x 60 x 60 x 3 mm	6000 mm	1,409
60 x 60 x 60 x 4 mm	6000 mm	1,858
60 x 60 x 60 x 5 mm	6000 mm	2,295
60 x 60 x 60 x 6 mm	6000 mm	2,722
25 x 65 x 25 x 2,5 mm	6000 mm	0,743
55 x 65 x 55 x 2,5 mm	6000 mm	1,148
20 x 70 x 20 x 2 mm	6000 mm	0,572
35 x 70 x 35 x 3 mm	6000 mm	1,090
40 x 70 x 40 x 3 mm	6000 mm	1,166
40 x 70 x 40 x 4 mm	6000 mm	1,534
70 x 70 x 70 x 5 mm	6000 mm	2,703
20 x 80 x 20 x 2 mm	6000 mm	0,626

EN AW-6060 T66 (AlMgSi)

A x B x A x S	Länge Length	kg/m
30 x 80 x 30 x 3 mm	6000 mm	1,085
40 x 80 x 40 x 2,5 mm	6000 mm	1,046
40 x 80 x 40 x 3 mm	6000 mm	1,247
40 x 80 x 40 x 4 mm	6000 mm	1,642
40 x 80 x 40 x 5 mm	6000 mm	2,025
40 x 80 x 40 x 6 mm	6000 mm	2,398
45 x 80 x 45 x 3 mm	6000 mm	1,328
45 x 80 x 45 x 6 mm	6000 mm	2,560
50 x 80 x 50 x 3 mm	6000 mm	1,409
50 x 80 x 50 x 5 mm	6000 mm	2,295
60 x 80 x 60 x 5 mm	6000 mm	2,565
80 x 80 x 80 x 4 mm	6000 mm	2,510
40 x 86 x 40 x 3 mm	2115 mm	1,360
40 x 86 x 40 x 3 mm	6000 mm	1,360
20 x 90 x 20 x 2,5 mm	6000 mm	0,850
40 x 90 x 40 x 3 mm	6000 mm	1,328
50 x 90 x 50 x 3 mm	6000 mm	1,490
50 x 90 x 50 x 5 mm	6000 mm	2,430
20 x 100 x 20 x 2 mm	6000 mm	0,734
40 x 100 x 40 x 3 mm	6000 mm	1,409
40 x 100 x 40 x 10 mm	6000 mm	4,320
50 x 100 x 50 x 3 mm	6000 mm	1,571
50 x 100 x 50 x 5 mm	6000 mm	2,565
50 x 100 x 50 x 10 mm	6000 mm	4,860
60 x 100 x 60 x 6 mm	6000 mm	3,370
100 x 100 x 100 x 3 mm	6000 mm	2,381
40 x 106 x 40 x 3 mm	6000 mm	1,458
20 x 120 x 20 x 2 mm	6000 mm	0,842
40 x 120 x 40 x 3 mm	6000 mm	1,571
40 x 120 x 40 x 4 mm	6000 mm	2,074
40 x 120 x 40 x 5 mm	6000 mm	2,565
60 x 120 x 60 x 5 mm	6000 mm	3,105
60 x 120 x 60 x 8 mm	6000 mm	4,840
80 x 125 x 80 x 8 mm	6000 mm	5,810
40 x 140 x 40 x 3 mm	6000 mm	1,733
60 x 140 x 60 x 7 mm	6000 mm	4,649
60 x 140 x 60 x 8 mm	6000 mm	5,270
70 x 140 x 70 x 8 mm	6000 mm	5,702
80 x 160 x 80 x 8 mm	6000 mm	6,568
60 x 170 x 60 x 4 mm	6000 mm	3,060
40 x 200 x 40 x 3 mm	6000 mm	2,219
50 x 200 x 50 x 5 mm	6000 mm	3,915
100 x 200 x 100 x 10 mm	6000 mm	10,260
38 x 260 x 38 x 3 mm	6000 mm	2,673
70 x 300 x 70 x 4 mm	6000 mm	4,666

EN AW-6080 T66 (AlMgSi)

U-Profile eloxiert A6/C0 15 µ • U-Profiles anodized A6/C0 15 µ
EN AW-6060 T66 (AlMgSi)



A x B x A x S	Länge Length	kg/m
20 x 13 x 20 x 1,25 mm	4000 mm	0,170
15 x 15 x 15 x 2 mm	6150 mm	0,221
20 x 15 x 20 x 1,5 mm	6150 mm	0,211
30 x 15 x 30 x 2 mm	6150 mm	0,383
10 x 20 x 10 x 2 mm	6150 mm	0,194
20 x 20 x 20 x 2 mm	6150 mm	0,302
30 x 20 x 30 x 2 mm	6150 mm	0,410
40 x 20 x 40 x 2 mm	6150 mm	0,518
25 x 25 x 25 x 2 mm	6150 mm	0,383
20 x 30 x 20 x 2 mm	6150 mm	0,356
30 x 30 x 30 x 2 mm	6150 mm	0,464
20 x 40 x 20 x 2 mm	6150 mm	0,410
40 x 40 x 40 x 2 mm	6150 mm	0,628
EN AW-6060 T66 (AlMgSi)		

U-Profile eloxiert „Edelstahloptik“ • U-Profiles anodized „stainless steel optic“
EN AW-6060 T66 (AlMgSi)

A x B x A x S	Länge Length	kg/m
15 x 15 x 15 x 2 mm	6150 mm	0,221
20 x 20 x 20 x 2 mm	6150 mm	0,302
30 x 20 x 30 x 2 mm	6150 mm	0,410
40 x 20 x 40 x 2 mm	6150 mm	0,518
EN AW-6060 T66 (AlMgSi)		

U-Profile beschichtet RAL 9010 • U-Profiles powder coated RAL 9010
EN AW-6060 T66 (AlMgSi)

A x B x A x S	Länge Length	kg/m
15 x 15 x 15 x 2 mm	6150 mm	0,221
20 x 20 x 20 x 2 mm	6150 mm	0,194
30 x 20 x 30 x 2 mm	6150 mm	0,410
40 x 20 x 40 x 2 mm	6150 mm	0,518
EN AW-6060 T66 (AlMgSi)		


U-Profile ungleichschenkelig • U-Profiles unequal
EN AW-6060 T66 (AlMgSi)

A x B x C x S	Länge Length	kg/m
27 x 10,4 x 12 x 1 / 1,2 mm	6000 mm	0,132
35 x 11 x 12 x 1,5 mm	6000 mm	0,222
40 x 40 x 16 x 2 mm	6000 mm	0,500
EN AW-6060 T66 (AlMgSi)		



Z-Profile • Z-Sections

EN AW-6060 T66 (AlMgSi)



A x B x C x S1 x S2	Länge Length	kg/m
12 x 12 x 10 x 2 x 2 mm	6000 mm	0,162
15 x 15 x 15 x 2 x 2 mm	6000 mm	0,221
24 x 18 x 24 x 3 x 3 mm	6000 mm	0,486
20 x 20 x 20 x 2 x 2 mm	6000 mm	0,302
20 x 20 x 20 x 3 x 3 mm	6000 mm	0,437
17 x 25 x 17 x 2 x 2 mm	6000 mm	0,297
25 x 25 x 25 x 3 x 3 mm	6000 mm	0,559
25 x 30 x 25 x 3 x 3 mm	6000 mm	0,599
30 x 30 x 30 x 3 x 3 mm	6000 mm	0,680
45 x 30 x 30 x 2 x 2 mm	6000 mm	0,545
17 x 32 x 17 x 2 x 2 mm	6000 mm	0,335
15 x 40 x 15 x 2 x 2 mm	6000 mm	0,356

EN AW-6060 T66 (AlMgSi)

A x B x C x S1 x S2	Länge Length	kg/m
30 x 40 x 30 x 3 x 3 mm	6000 mm	0,761
40 x 40 x 40 x 2,5 x 2,5 mm	6000 mm	0,776
40 x 40 x 40 x 3 x 3 mm	6000 mm	0,923
18 x 43 x 18 x 3 x 3 mm	6000 mm	0,592
30 x 50 x 30 x 3 x 3 mm	6000 mm	0,842
35 x 50 x 35 x 3 x 3 mm	6000 mm	0,923
50 x 50 x 50 x 4 x 4 mm	6000 mm	1,534
24 x 60 x 24 x 2 x 2 mm	6000 mm	0,562
30 x 60 x 30 x 2 x 2 mm	6000 mm	0,626
40 x 60 x 40 x 4 x 4 mm	6000 mm	1,426
40 x 70 x 40 x 3 x 3 mm	6000 mm	1,166
40 x 86 x 40 x 3 x 3 mm	6000 mm	1,296


EN AW-6060 T66 (AlMgSi)

Z-Profile 135° • Z-Sections 135°

EN AW-6060 T66 (AlMgSi)

A x B x C x S1 x S2	Länge Length	kg/m
15 x 22 x 15 x 2 x 2 mm	6000 mm	0,320
30 x 45 x 30 x 2 x 2 mm	6000 mm	0,650

EN AW-6060 T66 (AlMgSi)




C-Profile • C-Profiles

EN AW-6060 T66 (AlMgSi)

A x B x S	Länge Length	Öffnung Hole	kg/m
24,3 x 10 x 1,5 mm	5000 mm	19,1 mm	0,180
24,3 x 10 x 1,5 mm	6000 mm	19,1 mm	0,180
24,3 x 10 x 1,5 mm	7000 mm	19,1 mm	0,180
24,5 x 10 x 2 mm	6000 mm	14,5 mm	0,250
25 x 10 x 1,5 mm	5000 mm	18 mm	0,200
25 x 10 x 1,5 mm	6000 mm	18 mm	0,200
25 x 10 x 1,5 mm	7000 mm	18 mm	0,200
25 x 10 x 2,5 mm	6000 mm	13 mm	0,319
30 x 15 x 1,5 mm	6000 mm	11 mm	0,297
30 x 15 x 2 mm	6000 mm	10 mm	0,388
125 x 30 x 1,7 mm	6000 mm	100 mm	0,942

EN AW-6060 T66 (AlMgSi)



Rundstangen gepresst • Round bars extruded EN AW-6060 T66 (AlMgSi)



D	Länge Length	kg/m
5 mm	6000 mm	0,053
6 mm	6000 mm	0,076
8 mm	6000 mm	0,136
8 mm (T4)	6000 mm	0,136
10 mm	6000 mm	0,212
12 mm	6000 mm	0,305
14 mm	6000 mm	0,416
15 mm	6000 mm	0,477
16 mm	6000 mm	0,543
18 mm	6000 mm	0,687
20 mm	6000 mm	0,848
22 mm	6000 mm	1,026
25 mm	6000 mm	1,325
EN AW-6060 T66 (AlMgSi)		

D	Länge Length	kg/m
30 mm	6000 mm	1,909
35 mm	6000 mm	2,598
40 mm	6000 mm	3,393
45 mm	6000 mm	4,294
50 mm	6000 mm	5,302
55 mm	6000 mm	6,415
60 mm	6000 mm	7,634
65 mm	6000 mm	8,959
70 mm	6000 mm	10,391
80 mm	6000 mm	13,572
90 mm	3000 mm	17,177
100 mm	3000 mm	21,206
150 mm	4200 mm	47,720
EN AW-6060 T66 (AlMgSi)		

Rundstangen • Round bars EN AW-1350A H112 (EAl99,5)

D	Länge Length	kg/m
20 mm	5000 mm	0,848
25 mm	5000 mm	1,316
30 mm	5000 mm	1,909
EN AW-1350A H112 (EAl99,5)		

EN AW-2011 T8 (AlCu6BiPb)

D	Info	Länge Length	kg/m
40 mm	gezogen • drawn	3000 mm	3,585
EN AW 2011 T8 (AlCu6BiPb)			

Rundstangen • Round bars

EN AW-2007 T3/T4 (AlCu4PbMgMn)



D	Info	Länge Length	kg/m
6 mm	gezogen • drawn	3000 mm	0,081
8 mm	gezogen • drawn	3000 mm	0,143
10 mm	gezogen • drawn	3000 mm	0,224
11 mm	gezogen • drawn	3000 mm	0,271
12 mm	gezogen • drawn	3000 mm	0,322
13 mm	gezogen • drawn	3000 mm	0,378
14 mm	gezogen • drawn	3000 mm	0,439
15 mm	gezogen • drawn	3000 mm	0,504
16 mm	gezogen • drawn	3000 mm	0,573
17 mm	gezogen • drawn	3000 mm	0,647
18 mm	gezogen • drawn	3000 mm	0,726
19 mm	gezogen • drawn	3000 mm	0,808
20 mm	gezogen • drawn	3000 mm	0,896
21 mm	gezogen • drawn	3000 mm	0,987
22 mm	gezogen • drawn	3000 mm	1,084
23 mm	gezogen • drawn	3000 mm	1,184
24 mm	gezogen • drawn	3000 mm	1,221
25 mm	gezogen • drawn	3000 mm	1,400
26 mm	gezogen • drawn	3000 mm	1,570
27 mm	gezogen • drawn	3000 mm	1,630
28 mm	gezogen • drawn	3000 mm	1,755
30 mm	gezogen • drawn	3000 mm	2,015
32 mm	gezogen • drawn	3000 mm	2,290
33,7 mm	gezogen • drawn	3000 mm	2,540
35 mm	gezogen • drawn	3000 mm	2,743
36 mm	gezogen • drawn	3000 mm	2,900
38 mm	gezogen • drawn	3000 mm	3,226
40 mm	gezogen • drawn	3000 mm	3,582
42 mm	gezogen • drawn	3000 mm	3,950
44 mm	gezogen • drawn	3000 mm	4,335
45 mm	gezogen • drawn	3000 mm	4,535
48 mm	gezogen • drawn	3000 mm	4,729
50 mm	gezogen • drawn	3000 mm	5,598
52 mm	gezogen • drawn	3000 mm	6,055
55 mm	gepresst • extruded	3000 mm	6,773
55 mm	gezogen • drawn	3000 mm	6,773
60 mm	gepresst • extruded	3000 mm	8,082
60 mm	gezogen • drawn	3000 mm	8,081
62 mm	gezogen • drawn	3000 mm	8,150
63 mm	gezogen • drawn	3000 mm	8,972
65 mm	gepresst • extruded	3000 mm	9,461
EN AW-2007 T3/T4 (AlCu4PbMgMn)			

D	Info	Länge Length	kg/m
70 mm	gepresst • extruded	3000 mm	10,973
75 mm	gepresst • extruded	3000 mm	12,596
80 mm	gepresst • extruded	3000 mm	14,330
85 mm	gepresst • extruded	3000 mm	16,179
90 mm	gepresst • extruded	3000 mm	18,138
95 mm	gepresst • extruded	3000 mm	20,210
100 mm	gepresst • extruded	3000 mm	22,393
105 mm	gepresst • extruded	3000 mm	24,688
110 mm	gepresst • extruded	3000 mm	27,095
115 mm	gepresst • extruded	3000 mm	29,615
120 mm	gepresst • extruded	3000 mm	32,246
125 mm	gepresst • extruded	3000 mm	34,989
130 mm	gepresst • extruded	3000 mm	37,844
140 mm	gepresst • extruded	3000 mm	43,890
145 mm	gepresst • extruded	3000 mm	47,038
150 mm	gepresst • extruded	3000 mm	50,384
155 mm	gepresst • extruded	3000 mm	53,799
160 mm	gepresst • extruded	3000 mm	57,326
170 mm	gepresst • extruded	3000 mm	64,716
180 mm	gepresst • extruded	3000 mm	72,490
190 mm	gepresst • extruded	3000 mm	80,760
200 mm	gepresst • extruded	3000 mm	89,572
210 mm	gepresst • extruded	3000 mm	98,754
220 mm	gepresst • extruded	3000 mm	108,380
230 mm	gepresst • extruded	3000 mm	118,460
240 mm	gepresst • extruded	3000 mm	128,985
250 mm	gepresst • extruded	3000 mm	139,957
260 mm	gepresst • extruded	3000 mm	151,378
270 mm	gepresst • extruded	3000 mm	163,250
280 mm	gepresst • extruded	3000 mm	175,560
290 mm	gepresst • extruded	3000 mm	188,330
300 mm	gepresst • extruded	3000 mm	201,539
310 mm	gepresst • extruded	3000 mm	215,000
320 mm	gepresst • extruded	3000 mm	229,094
340 mm	gepresst • extruded	3000 mm	258,630
350 mm	gepresst • extruded	3000 mm	274,063
400 mm	gepresst • extruded	2500 mm	357,960
450 mm	gepresst • extruded	2500 mm	453,043
500 mm	gegossen • casted	1000 mm	559,313
500 mm	gepresst • extruded	2000 mm	559,313
EN AW-2007 T3/T4 (AlCu4PbMgMn)			

Rundstangen • Round bars

EN AW-2024 T3 (AlCu4Mg1)



D	Info	Länge Length	kg/m
8 mm	gezogen • drawn	3000 mm	0,139
10 mm	gezogen • drawn	3000 mm	0,217
12 mm	gezogen • drawn	3000 mm	0,313
16 mm	gezogen • drawn	3000 mm	0,557
18 mm	gezogen • drawn	3000 mm	0,705
20 mm	gezogen • drawn	3000 mm	0,870
22 mm	gezogen • drawn	3000 mm	1,052
25 mm	gezogen • drawn	3000 mm	1,359
30 mm	gezogen • drawn	3000 mm	1,957
32 mm	gezogen • drawn	3000 mm	2,227
36 mm	gezogen • drawn	3000 mm	2,818
40 mm	gezogen • drawn	3000 mm	3,517
45 mm	gezogen • drawn	3000 mm	4,403
50 mm	gezogen • drawn	3000 mm	5,436
56 mm	gezogen • drawn	3000 mm	6,819
60 mm	gezogen • drawn	3000 mm	7,828
EN AW-2024 T4 (AlCu4Mg1)			

D	Info	Länge Length	kg/m
65 mm	gepresst • extruded	3000 mm	9,187
70 mm	gepresst • extruded	3000 mm	10,390
75 mm	gepresst • extruded	3000 mm	12,231
80 mm	gepresst • extruded	3000 mm	14,288
90 mm	gepresst • extruded	3000 mm	17,613
100 mm	gepresst • extruded	3000 mm	21,200
110 mm	gepresst • extruded	3000 mm	26,310
120 mm	gepresst • extruded	3000 mm	33,333
130 mm	gepresst • extruded	3000 mm	36,748
140 mm	gepresst • extruded	3000 mm	42,620
150 mm	gepresst • extruded	3000 mm	48,925
160 mm	gepresst • extruded	3000 mm	55,666
180 mm	gepresst • extruded	3000 mm	70,452
200 mm	gepresst • extruded	3000 mm	86,980
250 mm	gepresst • extruded	3000 mm	135,900
EN AW-2024 T4 (AlCu4Mg1)			

EN AW-5083 (AlMg4,5Mn)

D	Info	Länge Length	kg/m
20 mm	gepresst • extruded	3000 mm	0,848
30 mm	gepresst • extruded	3000 mm	1,923
40 mm	gepresst • extruded	3000 mm	3,448
50 mm	gepresst • extruded	3000 mm	5,263
55 mm	gepresst • extruded	3000 mm	6,317
60 mm	gepresst • extruded	3000 mm	7,630
65 mm	gepresst • extruded	3000 mm	9,091
70 mm	gepresst • extruded	3000 mm	10,230
75 mm	gepresst • extruded	3000 mm	11,920
80 mm	gepresst • extruded	3000 mm	13,364
EN AW-5083 (AlMg4,5Mn)			

D	Info	Länge Length	kg/m
85 mm	gepresst • extruded	3000 mm	15,313
90 mm	gepresst • extruded	3000 mm	16,667
95 mm	gepresst • extruded	3000 mm	18,845
100 mm	gepresst • extruded	3000 mm	20,888
110 mm	gepresst • extruded	3000 mm	25,266
120 mm	gepresst • extruded	3000 mm	30,039
130 mm	gepresst • extruded	3000 mm	35,820
140 mm	gepresst • extruded	3000 mm	40,939
150 mm	gepresst • extruded	3000 mm	46,980
300 mm	gepresst • extruded	2000 mm	188,000
EN AW-5083 (AlMg4,5Mn)			

Rundstangen • Round bars

EN AW-6082 T6 (AlSi1MgMn)



D	Info	Länge Length	kg/m
6 mm	gepresst • extruded	1030 mm	0,076
6 mm	gepresst • extruded	1430 mm	0,076
8 mm	gezogen • drawn	3000 mm	0,136
9 mm	gezogen • drawn	3000 mm	0,172
10 mm	gezogen • drawn	3000 mm	0,212
12 mm	gezogen • drawn	3000 mm	0,305
13 mm	gezogen • drawn	3000 mm	0,358
14 mm	gezogen • drawn	3000 mm	0,416
15 mm	gezogen • drawn	3000 mm	0,477
16 mm	gezogen • drawn	3000 mm	0,543
18 mm	gezogen • drawn	3000 mm	0,687
20 mm	gezogen • drawn	3000 mm	0,848
22 mm	gezogen • drawn	3000 mm	1,026
24 mm	gepresst • extruded	3000 mm	1,220
25 mm	gezogen • drawn	3000 mm	1,325
26 mm	gepresst • extruded	3000 mm	1,434
28 mm	gezogen • drawn	3000 mm	1,724
30 mm	gepresst • extruded	3000 mm	1,910
30 mm	gezogen • drawn	3000 mm	1,910
32 mm	gezogen • drawn	3000 mm	2,170
33,7 mm	gezogen • drawn	3000 mm	2,416
35 mm	gezogen • drawn	3000 mm	2,598
38 mm	gezogen • drawn	3000 mm	3,062
40 mm	gepresst • extruded	3000 mm	3,390
40 mm	gezogen • drawn	3000 mm	3,390
42 mm	gezogen • drawn	3000 mm	3,740
45 mm	gezogen • drawn	3000 mm	4,290
50 mm	gepresst • extruded	3000 mm	5,300
50 mm	gezogen • drawn	3000 mm	5,300
55 mm	gepresst • extruded	3000 mm	6,415
55 mm	gezogen • drawn	3000 mm	6,415
60 mm	gepresst • extruded	3000 mm	7,634
60 mm	gezogen • drawn	3000 mm	7,634
65 mm	gepresst • extruded	3000 mm	8,960
70 mm	gepresst • extruded	3000 mm	10,390
75 mm	gepresst • extruded	3000 mm	11,928
80 mm	gepresst • extruded	3000 mm	13,570
85 mm	gepresst • extruded	3000 mm	15,320
EN AW-6082 T6 (AlSi1MgMn)			

D	Info	Länge Length	kg/m
90 mm	gepresst • extruded	3000 mm	17,180
95 mm	gepresst • extruded	3000 mm	19,140
100 mm	gepresst • extruded	3000 mm	21,210
105 mm	gepresst • extruded	3000 mm	23,379
110 mm	gepresst • extruded	3000 mm	25,658
115 mm	gepresst • extruded	3000 mm	28,044
120 mm	gepresst • extruded	3000 mm	30,536
125 mm	gepresst • extruded	3000 mm	33,134
130 mm	gepresst • extruded	3000 mm	35,837
135 mm	gepresst • extruded	3000 mm	38,647
140 mm	gepresst • extruded	3000 mm	41,563
145 mm	gepresst • extruded	3000 mm	44,585
150 mm	gepresst • extruded	3000 mm	47,712
160 mm	gepresst • extruded	3000 mm	54,287
170 mm	gepresst • extruded	3000 mm	61,284
180 mm	gepresst • extruded	3000 mm	68,706
190 mm	gepresst • extruded	3000 mm	76,553
200 mm	gepresst • extruded	3000 mm	84,823
210 mm	gepresst • extruded	3000 mm	93,517
220 mm	gepresst • extruded	3000 mm	102,636
225 mm	gepresst • extruded	3000 mm	107,350
230 mm	gepresst • extruded	3000 mm	112,178
240 mm	gepresst • extruded	3000 mm	122,140
250 mm	gepresst • extruded	3000 mm	132,536
260 mm	gepresst • extruded	3000 mm	143,350
270 mm	gepresst • extruded	3000 mm	154,590
280 mm	gepresst • extruded	3000 mm	166,250
290 mm	gepresst • extruded	3000 mm	178,340
300 mm	gepresst • extruded	3000 mm	190,850
310 mm	gepresst • extruded	3000 mm	204,438
320 mm	gepresst • extruded	3000 mm	217,840
350 mm	gepresst • extruded	3000 mm	260,600
360 mm	gepresst • extruded	3000 mm	275,700
380 mm	gepresst • extruded	3000 mm	307,190
400 mm	gepresst • extruded	2500 mm	340,380
450 mm	gepresst • extruded	2000 mm	430,790
500 mm	gepresst • extruded	2000 mm	531,840
EN AW-6082 T6 (AlSi1MgMn)			


Rundstangen • Round bars

EN AW-7075 T6 (AlZn5,5MgCu)



D	Info	Länge Length	kg/m
10 mm	gezogen • drawn	3000 mm	0,220
15 mm	gezogen • drawn	3000 mm	0,477
20 mm	gezogen • drawn	3000 mm	0,848
25 mm	gezogen • drawn	3000 mm	1,374
30 mm	gezogen • drawn	3000 mm	1,961
35 mm	gezogen • drawn	3000 mm	2,693
40 mm	gezogen • drawn	3000 mm	3,517
45 mm	gezogen • drawn	3000 mm	4,450
50 mm	gezogen • drawn	3000 mm	5,560
55 mm	gezogen • drawn	3000 mm	6,649
60 mm	gepresst • extruded	3000 mm	7,913
65 mm	gepresst • extruded	3000 mm	9,287
70 mm	gepresst • extruded	3000 mm	10,770
75 mm	gepresst • extruded	3000 mm	12,364
80 mm	gepresst • extruded	3000 mm	14,067
85 mm	gepresst • extruded	3000 mm	15,880
90 mm	gepresst • extruded	3000 mm	17,804
95 mm	gepresst • extruded	3000 mm	19,837
100 mm	gepresst • extruded	3000 mm	21,980
110 mm	gepresst • extruded	3000 mm	26,596
120 mm	gepresst • extruded	3000 mm	31,651
130 mm	gepresst • extruded	3000 mm	37,146
EN AW-7075 T6 (AlZn5,5MgCu)			

D	Info	Länge Length	kg/m
140 mm	gepresst • extruded	3000 mm	43,080
150 mm	gepresst • extruded	3000 mm	48,455
160 mm	gepresst • extruded	3000 mm	56,269
170 mm	gepresst • extruded	3000 mm	63,522
180 mm	gepresst • extruded	3000 mm	71,215
190 mm	gepresst • extruded	3000 mm	79,348
200 mm	gepresst • extruded	3000 mm	87,920
210 mm	gepresst • extruded	3000 mm	96,932
220 mm	gepresst • extruded	3000 mm	106,380
230 mm	gepresst • extruded	3000 mm	116,270
240 mm	gepresst • extruded	3000 mm	126,600
250 mm	gepresst • extruded	3000 mm	137,380
260 mm	gepresst • extruded	3000 mm	148,580
270 mm	gepresst • extruded	3000 mm	160,230
280 mm	gepresst • extruded	3000 mm	172,320
290 mm	gepresst • extruded	3000 mm	184,850
300 mm	gepresst • extruded	3000 mm	197,820
320 mm	gepresst • extruded	3000 mm	225,080
340 mm	gepresst • extruded	3000 mm	254,090
350 mm	gepresst • extruded	3000 mm	269,260
400 mm	gepresst • extruded	2500 mm	351,680
400 mm	gepresst • extruded	3000 mm	351,680
EN AW-7075 T6 (AlZn5,5MgCu)			



Vierkantstangen • Square bars

EN AW-6060 T66 (AlMgSi)

A x B	Länge Length	kg/m
5 x 5 mm	6000 mm	0,068
6 x 6 mm*	6000 mm	0,097
8 x 8 mm	6000 mm	0,173
10 x 10 mm	6000 mm	0,270
12 x 12 mm	6000 mm	0,389
14 x 14 mm	6000 mm	0,529
15 x 15 mm	6000 mm	0,608
16 x 16 mm	6000 mm	0,691
18 x 18 mm	6000 mm	0,875
20 x 20 mm	6000 mm	1,080
25 x 25 mm	6000 mm	1,688
EN AW-6060 T66 (AlMgSi)		

A x B	Länge Length	kg/m
30 x 30 mm	6000 mm	2,430
35 x 35 mm	6000 mm	3,308
40 x 40 mm	6000 mm	4,320
45 x 45 mm	6000 mm	5,468
50 x 50 mm	6000 mm	6,750
55 x 55 mm	6000 mm	8,168
60 x 60 mm	6000 mm	9,720
70 x 70 mm	6000 mm	13,230
80 x 80 mm	6000 mm	17,280
90 x 90 mm	3000 mm	21,870
EN AW-6060 T66 (AlMgSi)		

* Radius 0,5 mm

EN AW-2024 T4 (AlCu4Mg1)

A x B	Info	Länge Length	kg/m
40 x 40 mm	gepresst • extruded	3000 mm	4,320
EN AW-2024 T4 (AlCu4Mg1)			


EN AW-2007 T3 (AlCu4PbMgMn)

A x B	Info	Länge Length	kg/m
10 x 10 mm	gezogen • drawn	3000 mm	0,285
12 x 12 mm	gezogen • drawn	3000 mm	0,411
15 x 15 mm	gezogen • drawn	3000 mm	0,642
16 x 16 mm	gezogen • drawn	3000 mm	0,730
20 x 20 mm	gezogen • drawn	3000 mm	1,140
25 x 25 mm	gezogen • drawn	3000 mm	1,782
30 x 30 mm	gezogen • drawn	3000 mm	2,566
40 x 40 mm	gepresst • extruded	3000 mm	4,512
40 x 40 mm	gezogen • drawn	3000 mm	4,512
50 x 50 mm	gepresst • extruded	3000 mm	7,128
50 x 50 mm	gezogen • drawn	3000 mm	7,128
60 x 60 mm	gepresst • extruded	3000 mm	10,264
60 x 60 mm	gezogen • drawn	3000 mm	10,264
EN AW-2007 T3 (AlCu4PbMgMn)			

A x B	Info	Länge Length	kg/m
70 x 70 mm	gepresst • extruded	3000 mm	13,971
80 x 80 mm	gepresst • extruded	3000 mm	18,248
90 x 90 mm	gepresst • extruded	3000 mm	23,085
100 x 100 mm	gepresst • extruded	3000 mm	28,512
110 x 110 mm	gepresst • extruded	3000 mm	34,490
120 x 120 mm	gepresst • extruded	3000 mm	41,040
130 x 130 mm	gepresst • extruded	3000 mm	48,170
140 x 140 mm	gepresst • extruded	3000 mm	55,880
150 x 150 mm	gepresst • extruded	3000 mm	64,150
160 x 160 mm	gepresst • extruded	3000 mm	72,990
180 x 180 mm	gepresst • extruded	3000 mm	92,379
200 x 200 mm	gepresst • extruded	3000 mm	114,050
EN AW-2007 T3 (AlCu4PbMgMn)			

Vierkantstangen • Square bars

EN AW-6082 T6 (AlSi1MgMn)



A x B	Info	Länge Length	kg/m
15 x 15 mm	gezogen • drawn	3000 mm	0,642
20 x 20 mm	gezogen • drawn	3000 mm	1,080
25 x 25 mm	gezogen • drawn	3000 mm	1,688
30 x 30 mm	gepresst • extruded	3000 mm	2,430
30 x 30 mm	gezogen • drawn	3000 mm	2,430
40 x 40 mm	gezogen • drawn	3000 mm	4,320
50 x 50 mm	gepresst • extruded	3000 mm	6,750
50 x 50 mm	gezogen • drawn	3000 mm	6,750
60 x 60 mm	gepresst • extruded	3000 mm	9,720
60 x 60 mm	gezogen • drawn	3000 mm	9,720
EN AW-6082 T6 (AlSi1MgMn)			

A x B	Info	Länge Length	kg/m
65 x 65 mm	gepresst • extruded	3000 mm	11,410
70 x 70 mm	gepresst • extruded	3000 mm	13,230
80 x 80 mm	gepresst • extruded	3000 mm	17,280
90 x 90 mm	gepresst • extruded	3000 mm	21,870
100 x 100 mm	gepresst • extruded	3000 mm	27,000
110 x 110 mm	gepresst • extruded	3000 mm	32,670
120 x 120 mm	gepresst • extruded	3000 mm	38,880
140 x 140 mm	gepresst • extruded	3000 mm	52,920
150 x 150 mm	gepresst • extruded	3000 mm	60,750
200 x 200 mm	gepresst • extruded	3000 mm	108,000
EN AW-6082 T6 (AlSi1MgMn)			

Sechskantstangen • Hexagonal bars

EN AW-2007 T3 (AlCu4PbMgMn)



SW*	Info	Länge Length	kg/m
13 mm	gezogen • drawn	3000 mm	0,400
14 mm	gezogen • drawn	3000 mm	0,458
17 mm	gezogen • drawn	3000 mm	0,741
19 mm	gezogen • drawn	3000 mm	0,926
22 mm	gezogen • drawn	3000 mm	1,205
24 mm	gezogen • drawn	3000 mm	1,347
EN AW-2007 T3 (AlCu4PbMgMn)			

SW*	Info	Länge Length	kg/m
27 mm	gezogen • drawn	3000 mm	1,800
30 mm	gezogen • drawn	3000 mm	2,104
32 mm	gezogen • drawn	3000 mm	2,384
36 mm	gezogen • drawn	3000 mm	3,030
41 mm	gezogen • drawn	3000 mm	3,930
46 mm	gezogen • drawn	3000 mm	4,947
EN AW-2007 T3 (AlCu4PbMgMn)			

* Schlüsselweite • Wrench size

EN AW-6082 T6 (AlSi1MgMn)

SW*	Info	Länge Length	kg/m
13 mm	gezogen • drawn	3000 mm	0,393
14 mm	gezogen • drawn	3000 mm	0,458
17 mm	gezogen • drawn	3000 mm	0,676
19 mm	gezogen • drawn	3000 mm	0,844
22 mm	gezogen • drawn	3000 mm	1,132
24 mm	gezogen • drawn	3000 mm	1,347
EN AW-6082 T6 (AlSi1MgMn)			

SW*	Info	Länge Length	kg/m
27 mm	gezogen • drawn	3000 mm	1,704
30 mm	gezogen • drawn	3000 mm	2,104
32 mm	gezogen • drawn	3000 mm	2,384
36 mm	gezogen • drawn	3000 mm	3,030
41 mm	gezogen • drawn	3000 mm	3,930
46 mm	gezogen • drawn	3000 mm	4,947
EN AW-6082 T6 (AlSi1MgMn)			

* Schlüsselweite • Wrench size

Bleche Sheets



Bleche Reinaluminium Al99,5 • Sheets pure aluminium Al99,5

EN AW-1050A

S x B x L	kg/Tfl kg/Sheet
1 x 1000 x 2000 mm	5,400
1,5 x 1000 x 2000 mm	8,100
2 x 1000 x 2000 mm	10,800
3 x 1000 x 2000 mm	16,200
4 x 1000 x 2000 mm	21,600
5 x 1000 x 2000 mm	27,000
6 x 1000 x 2000 mm	32,400
10 x 1000 x 2000 mm	55,630
1 x 1250 x 2500 mm	8,438
1,2 x 1250 x 2500 mm	10,125
1,5 x 1250 x 2500 mm	12,500
2 x 1250 x 2500 mm	16,875
3 x 1250 x 2500 mm	25,400
EN AW-1050A (Al99,5)	

S x B x L	kg/Tfl kg/Sheet
4 x 1250 x 2500 mm	33,333
5 x 1250 x 2500 mm	42,188
6 x 1250 x 2500 mm	50,625
1 x 1500 x 3000 mm	12,200
1,5 x 1500 x 3000 mm	18,225
2 x 1500 x 3000 mm	24,300
3 x 1500 x 3000 mm	36,450
4 x 1500 x 3000 mm	48,600
5 x 1500 x 3000 mm	60,750
1,5 x 1500 x 4000 mm	25,000
2 x 2000 x 4000 mm	43,200
3 x 2000 x 4000 mm	64,800
EN AW-1050A (Al99,5)	



Bleche AlMg3 • Sheets AlMg3

EN AW-5754

S x B x L	kg/Tfl kg/Sheet
1 x 1000 x 2000 mm	5,400
2 x 1000 x 2000 mm	10,800
3 x 1000 x 2000 mm	16,200
4 x 1000 x 2000 mm	21,600
5 x 1000 x 2000 mm	27,000
6 x 1000 x 2000 mm	32,400
8 x 1000 x 2000 mm	43,200
10 x 1000 x 2000 mm	54,000
12 x 1000 x 2000 mm	64,808
15 x 1000 x 2000 mm	81,004
20 x 1000 x 2000 mm	108,000
2 x 1250 x 2500 mm	16,875
EN AW-5754 (AlMg3)	

S x B x L	kg/Tfl kg/Sheet
3 x 1250 x 2500 mm	25,313
4 x 1250 x 2500 mm	33,333
5 x 1250 x 2500 mm	42,188
6 x 1250 x 2500 mm	50,000
8 x 1250 x 2500 mm	67,503
1 x 1500 x 3000 mm	12,500
2 x 1500 x 3000 mm	24,300
3 x 1500 x 3000 mm	36,450
4 x 1500 x 3000 mm	48,600
5 x 1500 x 3000 mm	60,750
6 x 1500 x 3000 mm	72,900
8 x 1500 x 3000 mm	97,200
EN AW-5754 (AlMg3)	



Bleche AlSi1MgMn • Sheets AlSi1MgMn

EN AW-6082 T6


S x B x L	kg/Tfl kg/Sheet
2 x 1000 x 2000 mm	11,001
3 x 1000 x 2000 mm	16,207
EN AW-6082 T6 (AlSi1MgMn)	



Trittbleche (Warzenbleche) AlMg3 • Tread plates AlMg3

EN AW-5754


S x B x L	kg/Tfl kg/Sheet
2 x 1000 x 2000 mm	12,500
3 x 1000 x 2000 mm	18,000
4 x 1000 x 2000 mm	23,400
5 x 1000 x 2000 mm	28,800
8 x 1000 x 2000 mm	45,000
2 x 1250 x 2500 mm	19,700
3 x 1250 x 2500 mm	28,000
4 x 1250 x 2500 mm	36,500
5 x 1250 x 2500 mm	45,000
8 x 1250 x 2500 mm	69,000
2 x 1500 x 3000 mm	28,400
3 x 1500 x 3000 mm	40,500
4 x 1500 x 3000 mm	52,600
5 x 1500 x 3000 mm	64,000
EN AW-5754 (AlMg3) Warzenhöhe: 1,5 mm • Warts height: 1,5 mm	

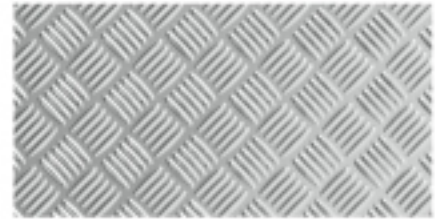

Diamondbleche AlMn1Cu • Diamond sheets AlMn1Cu

EN AW-3003


S x B x L	kg/Tfl kg/Sheet
1,5 x 1000 x 2000 mm	8,190
EN AW-3003 (AlMn1Cu) Warzenhöhe: 0,5 mm • Warts height: 0,5 mm	

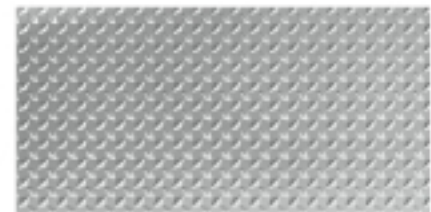

Lochbleche Quadratlochung Al99,5 • Perforated sheets square Al99,5

EN AW-1050A

S x B x L	kg/Tfl kg/Sheet	Lochung Perforation	Teilung Division
2 x 1000 x 2000 mm	6,600	5 x 5 mm	8 mm
2 x 1000 x 2000 mm	6,024	10 x 10 mm	15 mm
2 x 1000 x 2000 mm	9,708	10 x 10 mm	30 mm
2 x 1000 x 2000 mm	9,009	20 x 20 mm	50 mm
2 x 1000 x 2000 mm	9,433	25 x 25 mm	70 mm
2 x 1250 x 2500 mm	10,400	5 x 5 mm	8 mm
2 x 1250 x 2500 mm	9,480	10 x 10 mm	15 mm
2 x 1250 x 2500 mm	14,084	20 x 20 mm	50 mm
2 x 1250 x 2500 mm	14,925	25 x 25 mm	70 mm
2 x 1500 x 3000 mm	13,888	10 x 10 mm	15 mm
2 x 1500 x 3000 mm	20,408	20 x 20 mm	50 mm
EN AW-1050A (Al99,5) Quadratische Lochung, gerade • Square holes, square pitch			

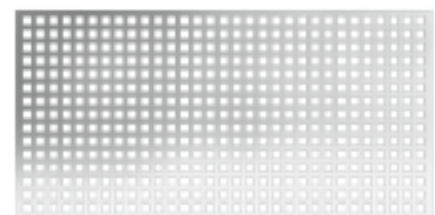

Teilung = Abstand von Lochmitte zu Lochmitte
Division = distance from hole center to hole center

Lochbleche Rundlochung Al99,5


Perforated sheets round Al99,5

EN AW-1050A

S x B x L	kg/Tfl kg/Sheet	Lochung Perforation	Teilung Division
1 x 1000 x 2000 mm	3,280	8 mm	12 mm
2 x 1000 x 2000 mm	7,042	5 mm	8 mm
2 x 1000 x 2000 mm	6,410	8 mm	12 mm
2 x 1000 x 2000 mm	6,578	10 mm	15 mm
2 x 1000 x 2000 mm	5,988	15 mm	21 mm
2 x 1250 x 2500 mm	10,309	10 mm	15 mm
2 x 1500 x 3000 mm	14,705	10 mm	15 mm

EN AW-1050A (Al99,5)
Rundlochung, versetzt • Round holes, staggered pitch

Teilung = Abstand von Lochmitte zu Lochmitte
Division = distance from hole center to hole center

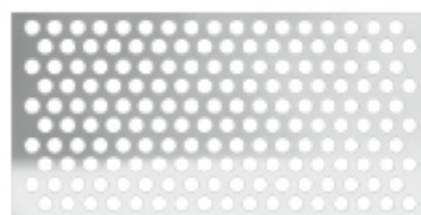

Bleche beschichtet RAL 9010, 60 µ, AlMn0,5Mg0,5

Sheets powder coated RAL 9010, 60 µ, AlMn0,5Mg0,5

EN AW-3105 H44

S x B x L	kg/Tfl kg/Sheet
2 x 1000 x 2000 mm	10,800
2 x 1250 x 2500 mm	16,667
1,2 x 1500 x 3000 mm	14,580
2 x 1500 x 3000 mm	25,000

EN AW-3105 H44 (AlMn0,5Mg0,5)

gut kantbar, quer zur Walzrichtung
good bending, transvers to the rolling direction

Bleche eloxiert A6/C0, AlMg1

Sheets anodized A6/C0, AlMg1

EN AW-5005 H14

S x B x L	kg/Tfl kg/Sheet
2 x 1000 x 2000 mm	10,800
2 x 1250 x 2500 mm	16,875
2 x 1500 x 3000 mm	24,300

EN AW-5005 H14 (AlMg1)
einseitig foliert • single side foiled

